



Hengshui Snowate Environmental Technology Co., Ltd.



— One-Stop Water treatment solutions provider —

www.snowate.com



Snøwate
One-Stop Water treatment solutions provider



Quality Control

Raw Material Inspection



Production Supervision



Final Product Inspection



Package Inspection



CONTENTS

UF Membranes	05
RO Membranes	08
NF Membranes	10
Other Brand Membrane	10
Ion Exchange Resin	11
Industrial pumps	12
Civil pumps	13
Pressure Controller	14
SS Filter Housings	15
Automatic Self Cleaning Filters	16
Plastic filter housing	17
Filter cartridges and filter bag	18
Plastic Valves And Pipe Fittings	19
Metal Valves for Pipelines	20
Process automation instruments	21
Create Water Quality Online Analysis Instruments	22
Imported Brand Instruments	23
Pressure Gauges	24
Solenoid Valve	24
Flow Meter	24

Automatic Control	25
Dosing Pump	26
Spare Parts for Fluid System	27
UV Water Purifier And Sterilizer	28
Ozone generator	29
Sodium Hypochlorite Generator	30
EDI(Electrodeionization)	31
RUNXIN® Valves	32
Snowate FRP tanks	33
FRP RO Housing	34
SS RO Housings	35
Coupling, Groove pipe and Blind cap	36
Stainless steel pipes and fittings	38
Moving Bed Biofilm Reactor(MBBR)	40
Sewage Treatment Equipment	40
Motor Series	41
SS And Carbon Steel Tanks	41
Product Application Cases	42
Our clients	43

UF Membranes



Hollow Fiber UF Membrane

Specialized in PVDF UF Membrane, using advanced NIPS production process, the product is characterized by good hydrophilicity and high tensile strength. Replacement models available for DuPont, Hydranautics, Hyflux, SUEZ, Toray, Asahi Kasei and more. It has been widely used in the United States, Canada, Australia, Brazil, Argentina, Chile and many other countries.

UF Replacement Model Chart

Type	Brand	Equivalent Model	Snowate Series No.	Replacement Model	Hollow Fiber Material	Membrane Surface Area(m ²)
UF	DOW	SFP-2860/SFD-2860/ SFP-2860XP/SFD-2860XP	SWUFD	SWUFD8964-51	PVDF	51
		SFP-2880/SFD-2880/ SFP-2880XP/SFD-2880XP		SWUFD8983-77	PVDF	77
		SFP-2660/SFD-2660		SWUFD6563-33	PVDF	33
		IP-51/IPD-51/IP-51XP/IPD-51XP		SWUFD8966-51	PVDF	51
		IP-77/IPD-77/IP-77XP/IPD-77XP		SWUFD8986-77	PVDF	77
	Suez	ZeeWeed 1500	SWUFS	SWUFS7069-55	PVDF	55.7
	Hydranautics	HYDRAcap MAX 40	SWUFH	SWUFH9844-52	PVDF	52
		HYDRAcap MAX 60		SWUFH9863-78	PVDF	78
		HYDRAcap MAX 80		SWUFH9883-105	PVDF	105
	Hyflux	K600ER	SWUFX	SWUFX1083-55	PVDF	55
		K600ET-0820 & ETUF-9060R		SWUFX1392-60	PVDF	60
		K600ETI-55		SWUFX1392-55	PVDF	55
		K600ETI-32		SWUFX1363-32	PVDF	32
		K600ETN		SWUFX1346-23	PVDF	23
	Asahi KASEI	UHA-620C	SWUFA	SWUFA6475-50	PVDF	50
	TORAY	HFUG-2020AN	SWUFT	SWUFT8567-90	PVDF	90
		HFU-2020N		SWUFT8567-72	PVDF	72
	MANN +HUMMEL	UA860-HP	SWUFUA	SWUFUA860-HP	PVDF	45

Advantages

- Technical R&D headquarters in USA and China
- All raw materials come from high quality manufacturers, and testing is conducted to ensure product quality.
- Finished products are 100% air-tightness tested and water-tested, with protective fluid.
- Regular products are in stock to ensure timely delivery.
- NSF certification
- Had water treatment industry cases in the United States, Canada, Italy, Mexico, Australia and other parts of the world.



Spinning



Membrane



UF Module Assembly



UF Module



Module Test



Package

UF Membranes

NSF



Technical Support

For your specific project conditions and requirements, we can provide customized technical solutions to ensure that your system design and operation are optimized. Our services include, but are not limited to: UF membrane installation drawings, UF system configuration sheets, design proposals and calculations, process flow diagrams, P&ID drawings, UF operation sequences, electrical wiring diagrams, equipment and piping layout diagrams, etc.

Our goal is to provide services that exceed expectations, offering you thoughtful technical support. We look forward to collaborating with you to develop efficient and sustainable water treatment solutions.

Application Cases

High quality membrane products and excellent technical services have successfully accumulated lots of application project cases, such as power plants, sea water desalination, electronic industries, drinking water, municipal water, landfill leachates, domestic sewage, electroplating wastewater, slaughterhouse wastewater, etc.

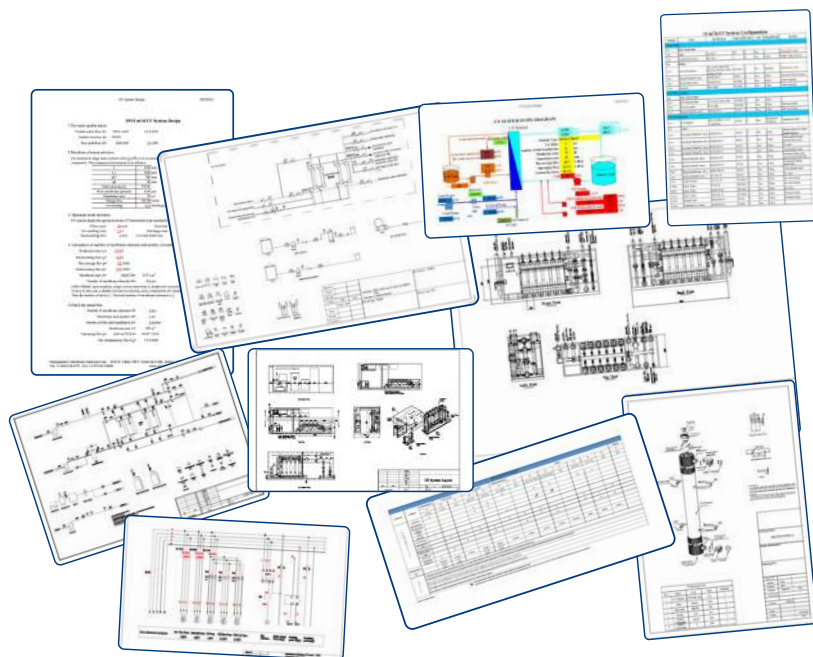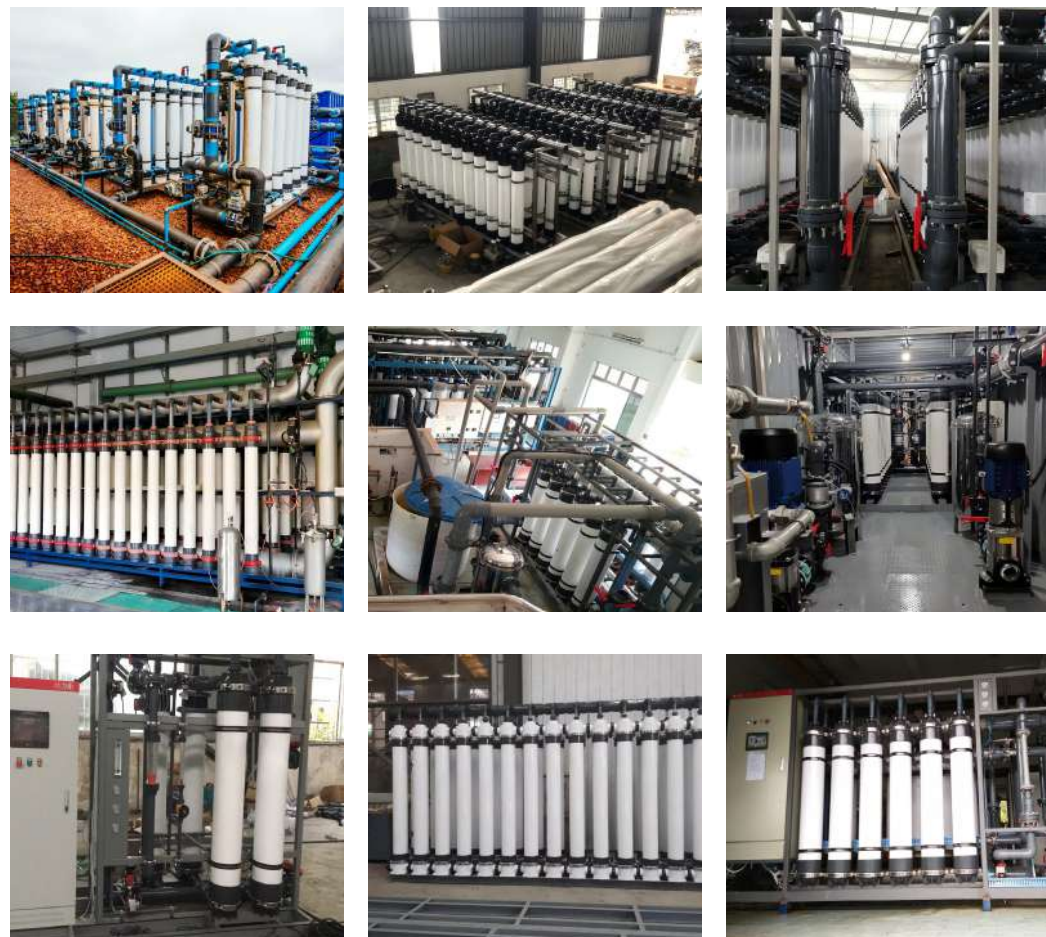

UF Membranes

Hollow Fiber MBR module

MBR modules are made with reinforced hollow fiber PVDF membrane. The hollow fibers have high tensile strength with excellent chemical resistance. 0.1/0.03 μm pore size provides superior rejection rate of suspended solids, bacteria and viruses. *Equivalent modules can be customized on customers' request.

Features

- PVDF Membrane Material
- Conventional models, and MITSUBISHI, MEMSTAR, SUEZ replacement models are available.
- Membrane area per sheet: 10-45 m^2
- Reinforced hollow fibers by unique NIPS technology. High Strength.

MBR Replacement Model Chart

Type	Brand	Equivalent Model	Snowate Series No.	Replacement Model	Hollow Fiber Material	Membrane Surface Area(m^2)
MBR	Memstar	SMM-1015T	SWB1V-M	SWB1V4022-15M	PVDF	15
		SMM-1522T		SWB1V5022-22M	PVDF	22
		SMM-2030T		SWB1V8022-30M	PVDF	30
	MITSUBISHI	SADF2590A	SWB1V-I	SWB1V7849-30I	PVDF	30
				SWB3V8633-31S	PVDF	31.6
	Suez	ZeeWeed 500D	SWB3V-S	SWB3V8633-34S	PVDF	34.4
				SWB3V8633-40S	PVDF	40.9



PTFE Flat sheet MBR


PTFE-MBR Flat Sheet Modules are made of highly hydrophilic PTFE membrane fiber, which have excellent chemical resistance and high hydrophilicity. With 0.2 μm filtration pore size, it has excellent retention effects on impurities such as solid particles, colloidal suspensions, and bacteria. Compared to traditional treatment processes and PVDF MBR membrane products, PTFE-MBR Flat Sheet modules have the advantages of small footprint, better effluent quality, longer service life, and stronger chemical cleaning tolerance.

Features

- Hydrophilic PTFE membrane material ensures best chemical resistance and anti-fouling performance.
- No backwash needed and easy maintenance.
- Suitable for critical wastewater such as landfill leachate, chemical wastewater etc.
- Retrofit modules are available for replacement projects.



Application Cases

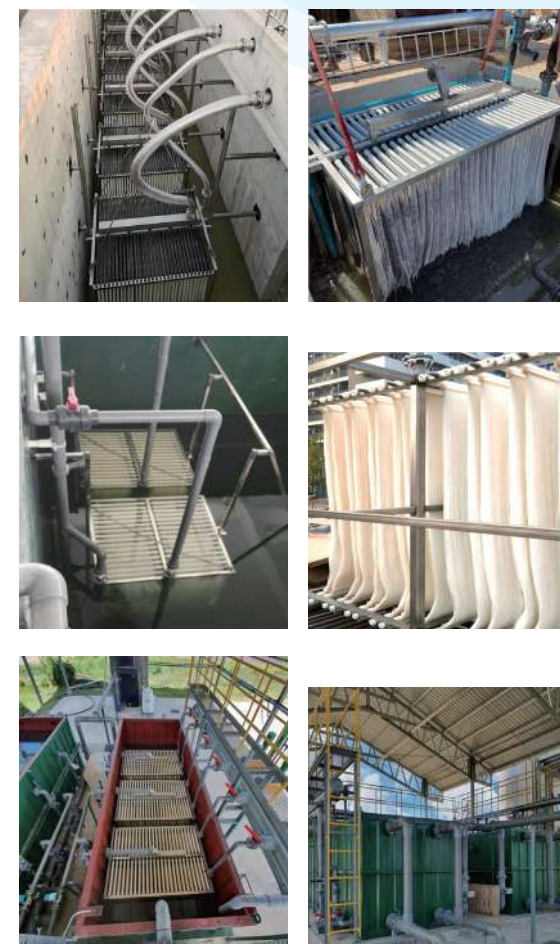

RO Membranes



Snowate RO membranes are made from imported raw materials and production equipment, and are available in a wide range of product models, meet the needs of different customers.

Advantages

- No oxidation post-treatment, resistant to chemical cleaning, with good recovery and stable performance.
- SW series membranes have high salt rejection, high flux, and high boron rejection, suitable for municipal and irrigation water.
- BW anti-fouling series membranes are suitable for conditions requiring frequent cleaning, supporting over 60 cleaning cycles.
- Proven replacement cases with Dow and Toray, with stable performance close to the original brands.

Application Cases



SM SW- 8040 - 400 HRFR/34

Abbreviation	Membrane Type	Diameter	Length	Active Area	Membrane Series	Feed Spacer
Snowate Membranes	SW: Seawater	80: 8" 40: 4"	40: 40"	440: 440 ft ² 400: 400 ft ² 82: 82 ft ²	HR: High Rejection; XLE: Extra Low Energy; HRLE: High Rejection& Low Energy; HRFR: High Rejection & Fouling Resistance; XHR: Extra High Rejection.	28: 28 mil 34: 34 mil

Seawater Desalination RO Membrane Performance Specifications

Type	Membrane Model	Active Area ft ² (m ²)	Flux gpd (m ³ /d)	Min. Rejection Rate (%)	Stabilized Rejection Rate (%)	Stabilized Boron Rejection Rate (%)	Test Conditions		
							Pressure psi (MPa)	Solution NaCl (ppm)	Recovery (%)
HR	SM SW-8040-400HR	400 (37.2)	6,500 (24.5)	99.65	99.80	92.0	800 (5.5)	32,000	8
	SM SW-4040-82HR	82 (7.6)	1,320 (5)	99.60	99.75	/			
XLE	SM SW-8040-400XLE	400 (37.2)	9,000 (34)	99.60	99.80	92.0			
	SM SW-4040-440XLE	440 (41)	9,750 (37)	99.60	99.80	92.0			
HRLE	SM SW-4040-82XLE	82 (7.6)	1,660 (6.3)	99.60	99.65	/			
	SM SW-8040-400HRLE	400 (37.2)	7,400 (28)	99.65	99.80	92.0			
	SM SW-8040-440HRLE	440 (41)	7,900 (30)	99.65	99.80	92.0			
HRFR	SM SW-4040-82HRLE	82 (7.6)	1,600 (6.1)	99.60	99.70	/			
	SM SW-8040-400HRFR/34	400 (37.2)	7,400 (28)	99.65	99.80	92.0			
	SM SW-4040-440XHR	440 (41)	6,600 (25)	99.70	99.82	92.0			
XHR	SM SW-8040-400XHR	400 (37.2)	6,100 (23)	99.70	99.82	92.0			
	SM SW-4040-82XHR	82 (7.6)	1,180 (4.5)	99.60	99.75	/			

RO Membranes



SM BW- 8040 - 400 FR/34

Abbreviation	Membrane Type	Diameter	Length	Active Area	Membrane Series	Feed Spacer
Snowate Membranes	BW: Brackish Water	80: 8" 40: 4"	40: 40"	440: 440 ft ² 400: 400 ft ² 82: 82 ft ²	HR: High Rejection; FR: Fouling Resistance; XFR: Extra Fouling Resistance; XLE: Extra Low Energy; FRLE: Fouling Resistance & Low Energy; HRLE: High Rejection & Low Energy	28: 28 mil 34: 34 mil

SM ULP- 8040 - 400

Abbreviation	Membrane Type	Diameter	Length	Active Area
Snowate Membranes	LP: Low Pressure ULP: Ultra Low Pressure XLP: Extra Low Pressure	80: 8" 40: 4" 25: 2.5"	40: 40" 21: 21"	440: 440 ft ² 400: 400 ft ² 82: 82 ft ²

Industrial Brackish Water RO Membrane Performance Specification

Type	Membrane Model	Active Area ft² (m²)	Flux gpd (m³/d)	Min. Rejection Rate (%)	Stabilized Rejection Rate (%)	Test Conditions		
						Pressure psi (MPa)	Solution NaCl (ppm)	Recovery (%)
HR	SM BW-8040-400HR	400 (37.2)	11,350 (43)	99.4	99.7	225 (1.55)	2,000	15
	SM BW-8040-440HR	440 (41)	12,560 (48)	99.4	99.7			
	SM BW-4040-82HR	82 (7.6)	2,250 (8.6)	99.3	99.5			
FR	SM BW-8040-400FR/34	400 (37.2)	11,100 (42)	99.35	99.5			
	SM BW-4040-82FR/34	82 (7.6)	2,000 (7.6)	99.3	99.5			
XFR	SM BW-8040-400XFR/34	400 (37.2)	11,350 (43)	99.4	99.6			
	SM BW-4040-82XFR/34	82 (7.6)	2,050 (7.8)	99.4	99.6			
XLE	SM BW-8040-400XLE	400 (37.2)	12,550 (47.5)	98.0	99.0	125 (0.86)	500	
	SM BW-8040-440XLE	440 (41)	14,000 (53)	98.0	99.0			
	SM BW-4040-82XLE	82 (7.6)	2,400 (9.1)	98.0	99.0			
FRLE	SM BW-8040-400FRLE/34	400 (37.2)	10,500 (40)	99.1	99.3	150 (1.03)	1500	
	SM BW-4040-82FRLE/34	82 (7.6)	1,900 (7.2)	99.0	99.3			
HRLE	SM BW-8040-400HRLE	400 (37.2)	11,350 (43)	99.1	99.3			
	SM BW-8040-440HRLE	440 (41)	12,560 (48)	99.1	99.3			
	SM BW-4040-82HRLE	82 (7.6)	2,250 (8.5)	99.0	99.3			

Brackish Water Membrane Performance Specification

Type	Membrane Model	Active Area ft ² (m ²)	Flux gpd (m ³ /d)	Min. Rejection Rate (%)	Stabilized Rejection Rate (%)	Test Conditions		
						Pressure psi (MPa)	Solution NaCl (ppm)	Recovery (%)
LP	SM LP-4040-82	82 (7.6)	2,250 (8.6)	99.3	99.6	225 (1.55)	2,000	15
	SM LP-8040-400	400 (37.2)	11,100 (42)	99.3	99.6			
ULP	SM ULP-4040-82	82 (7.6)	2,250 (8.6)	99.0	99.5	150 (1.03)	1,500	15
	SM ULP-8040-400	400 (37.2)	11,350 (43)	99.0	99.5			
	SM ULP-8040-440	440 (41)	12,650 (48)	99.0	99.5			
XLP	SM XLP-4040-82	82 (7.6)	2,220 (8.4)	98.0	99.0	100 (0.69)	500	15
	SM XLP-8040-400	400 (37.2)	11,900 (45)	98.0	99.0			
	SM XLP-8040-440	440 (41)	13,200 (50)	98.0	99.0			

Commercial Membrane Performance Specification

Type	Membrane Model	Active Area ft ² (m ²)	Flux gpd (m ³ /d)	Min. Rejection Rate (%)	Stabilized Rejection Rate (%)	Test Conditions		
						Pressure psi (MPa)	Solution NaCl (ppm)	Recovery (%)
Commercial Seawater Desalination	SM SW-2540-28HR	28 (2.6)	580 (2.2)	99.55	99.7	800 (5.5)	32,000	8
	SM SW-4021-33HR	33 (3.1)	660 (2.5)	99.55	99.65			5
	SM SW-2521-12HR	12 (1.1)	240 (0.9)	99.5	99.6			5
	SM SW-2540-28HRLE	28 (2.6)	680 (2.6)	99.5	99.65			8
	SM SW-4021-33HRLE	33 (3.1)	790 (3)	99.5	99.6			5
	SM SW-2521-12HRLE	12 (1.1)	290 (1.1)	99.4	99.55			5

NF Membranes

Snowate NF Membranes

Nanofiltration membrane is used for material separation, concentration and purification. It has the characteristics of large flux and low operating pressure. It can selectively permeate or intercept different molecular weights to achieve the separation, concentration and purification of organic compounds with different molecular weights, monovalent and multivalent salts, and has the characteristics of low energy consumption, good operating economy and long service life.

SM NF - 90 - 80 40 - 400 / 34

Abbreviation	Membrane Type	MWCO	Diameter	Length	Active Area	Feed Spacer
Snowate Membranes	Nanofiltration	90 150 280 500	80: 8" 40: 4"	40: 40"	400: 400 ft ² 82: 82 ft ²	28: 28 mil 34: 34 mil

Nano Filtration Membrane Performance Specifications

Type	Membrane Model	Active Area ft ² (m ²)	Flux gpd (m ³ /d)	Stablized Rejection Rate (%)	Test Conditions		
					Pressure psi (MPa)	Solution NaCl (ppm)	Recovery (%)
90 Series	SM NF-90-8040-400	400 (37.2)	8,200 (31)	> 98.5	70 (0.48)	2,000 ppm MgSO ₄	15
	SM NF-90-4040-82	82 (7.6)	1,580 (6)	> 98.5			
150 Series	SM NF-150-8040-400/34	400 (37.2)	8,950 (34)	> 98			
	SM NF-150-4040-82	82 (7.6)	1,850 (7)	> 98			
280 Series	SM NF-280-8040-400	400 (37.2)	12,410 (47)	> 97			
	SM NF-280-4040-82	82 (7.6)	2,430 (9.2)	> 97			
500 Series	SM NF-500-8040-400	400 (37.2)	13,200 (50.0)	> 90			
	SM NF-500-4040-82	82 (7.6)	2,900 (11)	> 90			

Other Brand Membrane

Snowate, as a One-Stop Water treatment solutions provider, to meet the needs of different customers and different applications, can provide multi-brand membranes, including Vontron, Toray, LG, Hydranautics, FILMTEC and so on.



Vontron



Toray



LG



Hydranautics



FILMTEC

Ion Exchange Resin

Resin Type Comparison Table



Snowate Resin	Purolite	Rohm& Haas		Dow Dowex	Bayer	Sybron	Mitsubishi
		Amberlite	Duolite				
Cation Exchange Resin							
001x4		IRA118					SK104
001x7Na	C-100E	IR-120 PLUS		HCR-S(E)S	S-100LF	C-240	
001x7H	C-100H	IR-120H	C-20H		S-100LF(H)	C-242	
001X8	C-100	IR-120	C-20/225	HCR-S(E)	S-100	C-249	SK1B
001x10	C-100X10	IR-122	C-20X10/255	HCR		C-250	SK110
D001	C-150/155	AMB200/IR-252	C-26S	MSC-1	SP-120	CFP-110	PK-228
D113H	C-104	IRC-76/86	C-464	MAC-3	CNP-80	CCP	WK-20
SXC-9		A21/15Dry					
Anion Exchange Resin							
201x4	A-400	IRA-402	A-113	SBR-P	M-504	ASB-P	SA12A
201x7	A-600	IRA-400	A-109	SBR-C	M-500	ASB-1	SA10A
D201	A-500	IRA-900	A-161	MSA-1	MP 500	A-641	PA-312
D202	A-510	IRA-910	A-162	MSA-2	MP-600	A-651	PA-412
D301G	A100E	IRA93/95/96		MWA-1	MP 64		WA 30
D311	A-845	IRA-67			AP 49		WA 10/11
Mixed Bed Resin							
MB400	NRW-37	IRN150	ARM-381	MR-3			MI-7000G
Macroporous Adsorption Resin							
D101		XAD-2					HP-20
AB-8		XAD-4					HP-21



We offer a variety of types and specifications of ion exchange resins to meet the needs of different industries and applications. Our products are known for their excellent performance, stability, and reliability. They undergo strict quality control to ensure outstanding performance in various applications.



Purolite Resin



Industrial pumps



Industrial pumps mainly include centrifugal pumps, pipeline circulation pumps, end suction centrifugal pumps, submersible sewage pumps, and high-pressure pumps. They are widely used in fields such as boosting, industry, water treatment, water supply, groundwater extraction, wastewater treatment, the chemical industry, and seawater desalination.



Civil pumps



Civil pumps are divided into agricultural and commercial pumps. Agricultural pumps mainly include small submersible pumps, well submersible pumps, and land pumps. These products are widely used in agriculture, forestry, and livestock fields. Commercial pumps primarily consist of pipeline pumps, multistage pumps, and sewage pumps, and are mainly used in industrial production, residential life, urban and rural development, environmental protection, and water management.



Pressure Controller

Automatic Pump Control
Manual Pressure Switch
Automatic Water Level Controller



SS Filter Housings



SS CARTRIDGE FILTER HOUSING:

- Cartridge qty: 3-120 elements
- Cartridge Length: 10", 20", 30", 40"
- Thickness: 1.5, 1.8, 2, 2.5, 3, 4, 5, 6mm
- Sanitary filters and high flow filters are available.

SS BAG FILTER HOUSING:

- Filter bags: 1#; 2#; 3#; 4#
- Thickness: 1.5, 2, 2.5, 3, 4, 5, 6mm
- Filter type: single-bag filter (clamp type, flat cap, top-in), multi-bag filter

Surface polishing or sandblast finishing.

Material: SUS304, SUS316L.

In/Out: NPT/BSP Threaded, ANSI Flange, sanitary clamp.



Automatic Self Cleaning Filters



Internal & External scraping self-cleaning filter
Fully Automatic Cleaning and Sewage Discharge
Multi-Precision Customized Filtering Element
Imported Reducer



Plastic filter housing



UPVC/PP/PVDF Bag Filter Housing:

1# filter bag, 2# filter bag

UPVC Melt Blown Cartridge Filter Housing:

3 elements, 5 elements, 8 elements, 9 elements

UPVC/PP/PVDF High Flow Cartridge Filter Housing:

for 20", 40" High Flow Cartridge

HIGH FLOW SKID PACKAGE UNITS



Filter cartridges and filter bag

FILTER CARTRIDGE SERIES:

Length: 10", 20", 30", 40", 60"; Diameter: 2.5", 4.5", 6"

Filter rating: 0.1, 0.22, 0.45, 1, 3, 5, 10, 20, 25, 30, 40, 50, 60, 70, 75, 100µm;

Type: melt blown; string wound; pleated; activated carbon filter cartridge and high flow filter cartridge



FILTER BAG SERIES:

Filter rating: 0.5-500 µm;

Material: PP, PE, NMO, PTFE, SS, LCR Oil Adsorption filter bag;

SIZE: 1#(180*430MM); 2#(180*810MM); 3#(105*230MM);
4#(105*380MM); 5#(150*560MM)



Plastic Valves And Pipe Fittings



Ball valves



Butterfly valves



Diaphragm Valves



Check Valves



Foot Valves



Plastic pipe and pipe fittings

Metal Valves for Pipelines



Process automation instruments



Recorders;
Water Quality Analyzers;
Flow meter;
Pressure Transmitters and Level Transmitters;
Temperature Sensors;
Signal Isolator



Create Water Quality Online Analysis Instruments



Conductivity/Resistivity/TDS Online Controller Series;
pH/ORP Online Meter Series;
Flow Meter Series;
RO Controller Series;

Transmitter Series;
Data Acquisition Terminal;
IOT Terminal Series;
Online Analysis System Integration.



Imported Brand Instruments

Silt Density Index (SDI) Measurement



Domestic manual SDI



RODI SDI



Mabat SDI



SPEARS Simple SDI

Filter Membrane



Millipore



ADVANTEC



Whatman



PALL

Water quality analysis instruments



Orion



Eutech

Pressure Gauges

Diameters: 1.5", 2", 2.5", 4".

Connection: Bottom, Back, front flange.

Unit: MPa/psi, bar/psi, kg/cm² etc.

Shell Material: SS304, SS316.

Port Thread: ZG, NPT etc.

Port Material: Copper nickel plated, stainless steel, brass.



Solenoid Valve

Flow Meter

Snowate can provide plastic tube flow meter, panel type flow meter, electromagnetic flow meter, metal tube float flow meter and etc.



Automatic Control



Siemens Automatic Control



Rockwell Automatic Control

SEKO® Dosing Pump



Electromagnetic metering pumps;
Mechanical metering pumps;
Peristaltic metering pumps;
Piston metering pumps.



Prominent® Dosing Pump



Solenoid-Driven Metering Pumps;
Motor-Driven Metering Pumps;
Peristaltic Metering Pumps;
Process metering pumps.



NEWDOSE® Dosing Pump



NEWDOSE Electromagnetic Driven Metering Pump;
ECODOSE series motor dosing pump;
NEWDOSE Motor Driven Diaphragm Metering Pump.



Spare Parts for Fluid System



UV Water Purifier And Sterilizer



Ozone generator



Air Feeding Ozone Generator

0.01 / 0.015 / 0.02 / 0.03 / 0.05 / 0.06 / 0.08 / 0.1 / 0.15 / 0.2 / 0.5 / 0.8 / 1 / 2 / 3 / 4 / 5 / 8 / 10 Kg/h (Small type);
15 / 20 / 25 / 30 Kg/h (Medium type)

Oxygen Feeding Ozone Generator

0.01 / 0.015 / 0.02 / 0.03 / 0.05 / 0.06 / 0.08 / 0.1 / 0.15 / 0.2 / 0.5 / 0.8 / 1 / 2 / 3 / 4 / 5 / 8 / 10 Kg/h (Small type)
15 / 20 / 25 / 30 / 40 / 50 Kg/h (Medium type)
60 / 80 / 100 / 120 / 150 Kg/h (Large type)

Ozone Water System:

10 / 20 / 30 g/h

Applied in fields such as water treatment, swimming pools, food processing, aquaculture, etc.



Sodium Hypochlorite Generator




The sodium hypochlorite generator produces low-concentration sodium hypochlorite from brine via diaphragm-free electrolysis, suitable for various chlorinated water treatment applications.

Carbon Steel Powder-Coated Shell Series:

50g / 100g / 200g / 300g / 400g / 500g / 800g / 1kg / 1.5kg / 2kg / 3kg / 4kg / 5kg / 6kg / 7kg / 8kg / 9kg / 10kg / 12kg / 12.5kg / 15kg / 20kg / 30kg / 40kg

PVC Frame Series: 50g / 100g / 200g / 300g / 400g / 500g

Simplified PVC Shell Series: 50g / 100g / 200g

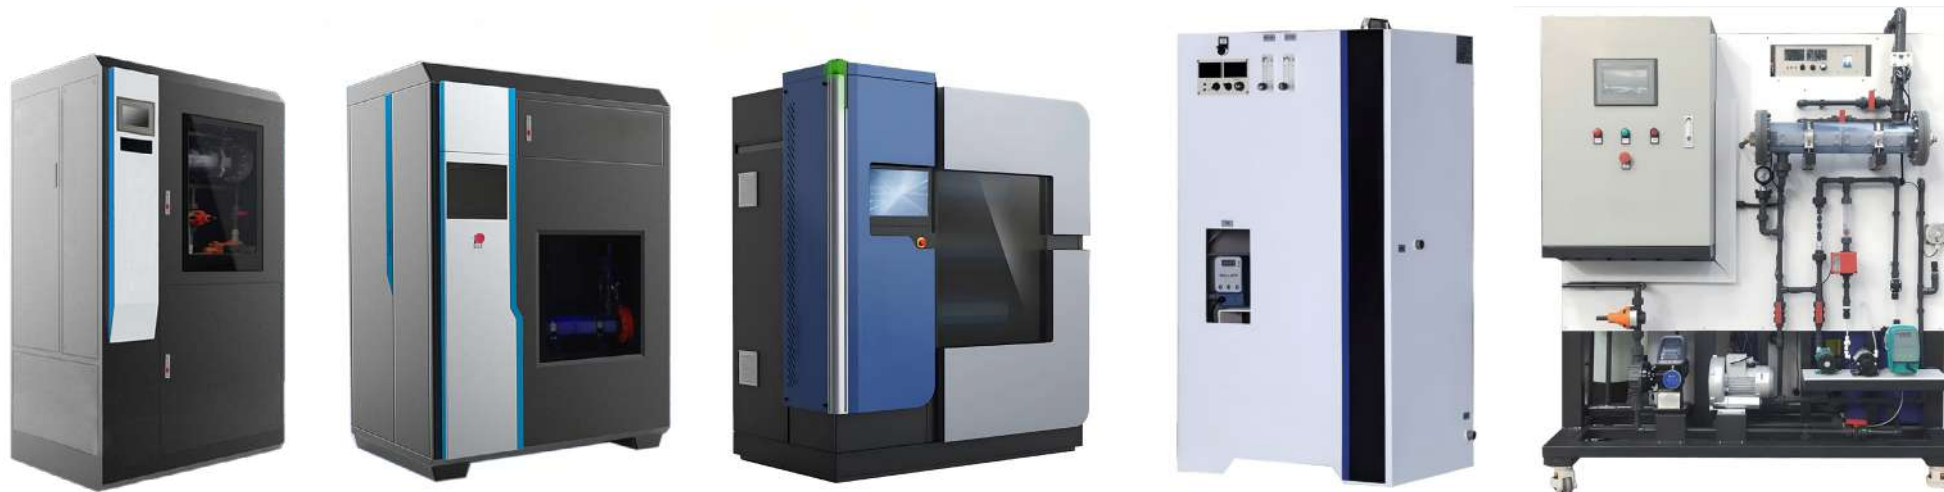

EDI(Electrodeionization)

Electrodeionization (EDI) is a chemical-free water purification technology that uses ion exchange and electricity to produce ultrapure water for industrial applications.

Replaces Siemens IONPURE series: 0.44 / 0.5 / 1.0 / 2.0 / 2.5 / 3.0 / 3.3 / 5.0 / 7.0 / 8.0 m³/h

Replaces GE E-CELL series: 3.0 / 5.0 m³/h

Micro EDI Stack for Laboratory Use series: 50 / 100 / 200 / 250 l/h



RUNXIN® Valves



RoHS



ACS

UKCA

Common Product Models

F56E1-2	F67B1	N75Q1	F79B-LCD	F69A3	N77A1	F88A	F99A1
F56E1-1	F67B3	N77B1	F63C1	F69G1	N77A3	F118A	F99D1
F56E2-2	F67B1-A	F67P1	F63C3	F97B3	F112A1	F118B	F130A1
F56E2-1	F67C1	F71P1	F63I3	F117A1	F112A3	F98A	F130A3
F56EC	F67C3	F112B1	F63B1	F117Q1	F63P1	F92A1-LED	F111A1
F56EC-2	F67Q1	F96B1	F63B3	F117Q3	F63P3	F92A1-LED/70F	F111A3
F56A1	F67Q3	F99B1	F63D1	F116Q1	F65P1	F92B1-LED	F112C3
F56A2	F67D1	F111B1	F63D3	F116Q3	F116A1	F92B1-LED/70F	F79A-LCD
F56AC	F67M	F64A1	F65B1	F68C1	F116A3	F92A3-LED	F79B-LCD
F56F1	F71B1	F64A2	F65B3	F68Q1	F117A3	F92E3-LED	F79A-LED
F56F2	F71Q1	F64AC	F65P3	F68Q3	F116A3/F70AL	F82A/B-LCD	F79B-LED
F56KY	F71Q3	F64B	F65G1	F69Q1	F116E3-LED	F82A/B-LED	F79A-LCD/F70D
F56L	F71G1	F64BC	F68C3	F69Q3	F133A1	F95A3	F79B-LCD/F70D
N56D1	F134A1	N64D	F68A3	F69P1	F99A3	F95B1	F79A-LED/F70D
N56D2	N75A1	N64F	F68D1	N74A1	F73	F95C1	F79B-LED/F70D
F77BS	N75A3	F77AS	F68D3	N74A3	F135	F95C3	F142A1
F112BS	N75B1	F112AS	F69A1	N74B1	F137	F95D1	F142A3



Snowate FRP tanks



Snowate FRP RO Housing



8 inch
(1-8 elements)

End port	Side port
300 psi	300 psi
450 psi	450 psi
600 psi	600 psi
1000 psi	1000 psi
1200 psi	1200 psi
1500 psi	1500 psi
1800 psi	1800 psi
2000 psi	2000 psi



4 inch
(1-7 elements)

End port	Side port
300 psi	300 psi
450 psi	450 psi
600 psi	600 psi
1000 psi	1000 psi
1200 psi	1200 psi
1500 psi	1500 psi
1800 psi	1800 psi
2000 psi	2000 psi



2.5 inch
(1 element)

End port
300 psi
1000 psi

SS RO Housings



8 inch
(1-6 elements)

End port

300 psi

Side port

300 psi

600 psi

1000 psi




8 inch sanitary grade
(1-6 elements)

Side port

600 psi

1000 psi

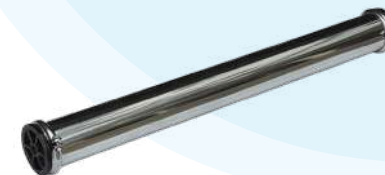

4 inch
(1-4 elements)

End port

250 psi

Side port

250 psi

1000 psi



4 inch sanitary grade
(1-4 elements)

Side port

400 psi



2.5 inch
(1 element)

End port

250 psi

Side port

250 psi

1000 psi



2.5 inch sanitary grade
(1 element)

Side port

400 psi

Coupling, Groove pipe and Blind cap

S30 SS Flexible Coupling Clamp



Nominal size		Pipe O.D.		Working Pressure	
DN	in	mm	in	psi	bar
DN20	0.75"	26.9	1.050	600	42
DN25	1"	33.7	1.315	600	42
DN32	1.25"	42.4	1.660	600	42
DN40	1.5"	48.3	1.900	600	42
DN50	2"	60.3	2.375	600	42
DN65	2.5"	73.0	2.875	600	42
DN80	3"	76.1	3.000	600	42
DN80	3"	88.9	3.500	600	42
DN150	6"	168.3	6.625	600	42
DN200	8"	219.1	8.625	600	42

Note: SS304, SS316L, SS2205, SS2507, four materials available.

S80 SS Flexible Coupling Clamp



Nominal size		Pipe O.D.		Working Pressure	
DN	in	mm	in	psi	bar
DN20	0.75"	26.9	1.050	1200	83
DN25	1"	33.7	1.315	1200	83
DN32	1.25"	42.4	1.660	1200	83
DN40	1.5"	48.3	1.900	1200	83
DN50	2"	60.3	2.375	1200	83
DN65	2.5"	73	2.875	1200	83
DN80	3"	76.1	3.000	1200	83
DN80	3"	88.9	3.500	1200	83
DN100	4"	114.3	4.500	1200	83

Note: SS304, SS316L, SS2205, SS2507, four materials available.

S160 SS Flexible Coupling Clamp



Nominal size		Pipe O.D.		Working Pressure	
DN	in	mm	in	psi	bar
DN20	0.75"	26.9	1.050	2322	160
DN25	1"	33.7	1.315	2322	160
DN32	1.25"	42.4	1.660	2322	160
DN40	1.5"	48.3	1.900	2322	160
DN50	2"	60.3	2.375	2322	160
DN65	2.5"	73.0	2.875	2322	160

Nominal size		Pipe O.D.		Working Pressure	
DN	in	mm	in	psi	bar
DN80	3"	76.1	3.000	2322	160
DN80	3"	88.9	3.500	2322	160
DN100	4"	114.3	4.500	2322	160
DN125	5"	139.7	5.500	2322	160
DN150	6"	168.3	6.625	2322	160
DN200	8"	219.1	8.625	2322	160

Note: SS304, SS316L, SS2205, SS2507, four materials available.

Coupling, Groove pipe and Blind cap

G30 SS Rigid Coupling Clamp



Nominal size		Pipe O.D.		Working Pressure	
DN	in	mm	in	psi	bar
DN100	4"	114.3	4.500	600	42
DN125	5"	139.7	5.500	600	42
DN150	6"	168.3	6.625	600	42
DN200	8"	219.1	8.625	600	42
DN250	10"	273.0	10.750	600	42

Note: SS304, SS316L, SS2205, SS2507, four materials available.



C Ductile Iron Flexible Coupling Clamp



Nominal size		Pipe O.D.		Working Pressure	
DN	in	mm	in	psi	bar
DN25	1"	33.7	1.315	600	42
DN32	1.25"	42.4	1.660	600	42
DN40	1.5"	48.3	1.900	600	42
DN50	2"	60.3	2.375	600	42
DN65	2.5"	73.0	2.875	600	42
DN80	3"	76.1	3.000	600	42
DN80	3"	88.9	3.500	600	42
DN100	4"	114.3	4.500	500	35
DN125	5"	140.0	5.511	450	31
DN150	6"	168.3	6.625	450	31
DN200	8"	219.1	8.625	450	31
DN250	10"	273.0	10.750	350	25
DN300	12"	323.9	12.750	350	25



Stainless steel pipes and fittings


Stainless Steel Buttwelding Pipe Fittings



Stainless steel pipes and fittings



Stainless Steel Threaded Pipe Fittings

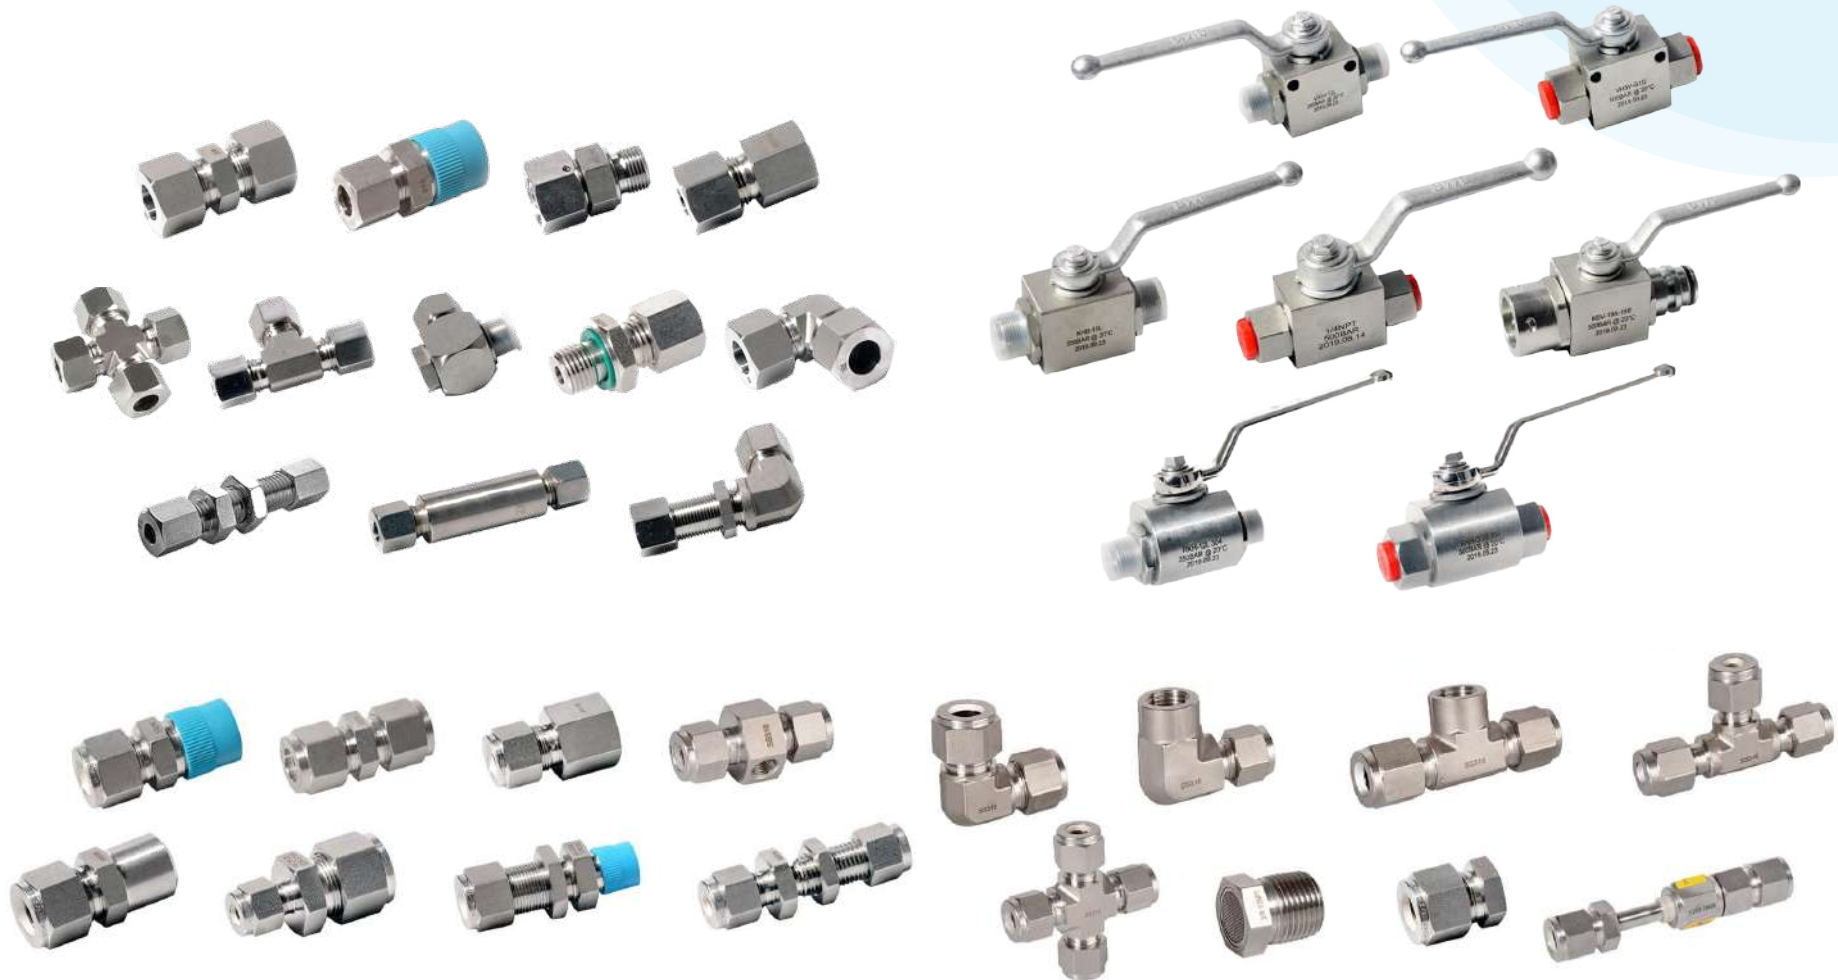


Moving Bed Biofilm Reactor(MBBR)

MBBR Bio Floating Filter Media

MBBR Biochips

Lamella Tube Media

MBBR Bio block

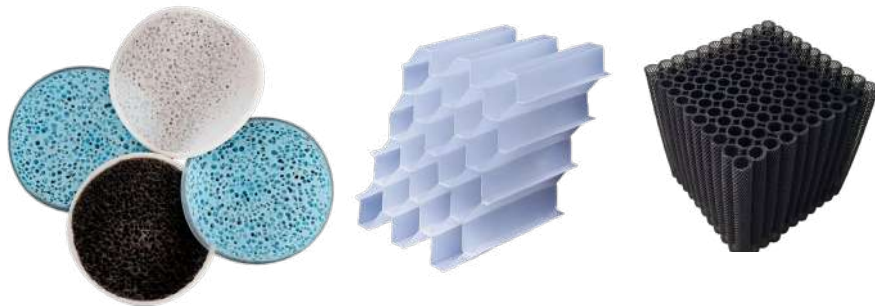

Sewage Treatment Equipment



High-Pressure
Blower



Roots Blower



Air Compressor



Plate Aerator



Dome Aerator



Tube Aerator

Motor Series



Three Phase Induction Motor



Single Phase Capacitor Running Induction Motor



High Temperature Motor




Converter Integrated Motor

SS And Carbon Steel Tanks



Product Application Cases

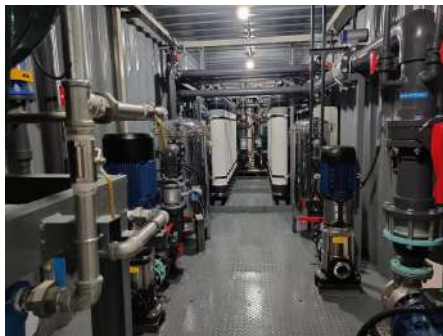

Our Clients



3M



Metito



AQUAPHOR International OÜ



BWT



Gradient



Water and Environment Technologies
Company - WETICO



BWT

If you are in industrial water treatment industry...
If you want to optimize your purchase process...
If you want to seeking a long-term strategic partner in China.
... ..

Choose **Snowate** 

We will win together !

Hengshui Snowate Environmental Technology Co., Ltd.

Address Hebei • China
Website www.snowate.com
E-mail snow@snowate.com
Telephone +86-15030811699 (WhatsApp, WeChat)



WeChat

WhatsApp

