


Pipe Clamp



Unit: mm

Nominal Diameter	D	T	H	L
DN15	φ 20	16	35	22
DN20	φ 25	16	37	29
DN25	φ 32	16	41	35
DN32	φ 40	16	45	46
DN40	φ 50	16	50	55
DN50	φ 63	16	57	66
DN65	φ 75	16	62	85
DN80	φ 90	20	70	99
DN100	φ 110	21	87	116

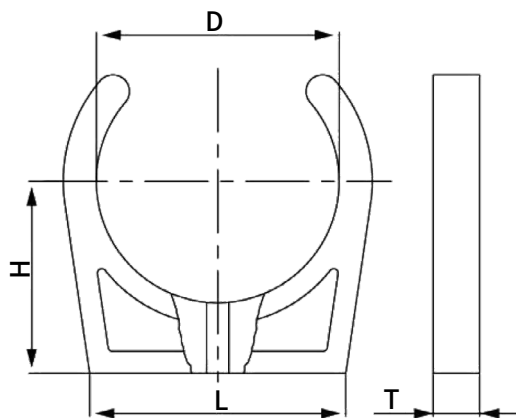

UPVC Plastic Pipeline Support Data Sheet

Size	φ	20	25	32	40	50	63	75	90	110	140	160	225	280	315
Support spacing (m)	20 °C	1.2	1.3	1.4	1.6	1.7	1.8	1.9	2.2	2.4	2.5	2.9	3.2	3.4	4.2
	50 °C	0.8	1.0	1.1	1.2	1.2	1.3	1.3	1.5	1.8	1.8	2.0	2.2	2.4	3.7

Note: The above data is applicable to fluid medium density of 1.0 g/cm³, the vibration is small, and the pipeline is laid horizontally. If the vibration is large, the spacing should be appropriately reduced.