

WATER DISTRIBUTORS

Snowate

Hengshui Snowate Environmental
Technology Co., Ltd.

EDITION FOR
SNOWATE CATALOG



HENGSHUI SNOWATE ENVIRONMENTAL TECHNOLOGY CO., LTD.

A TRUSTWORTHY SOURCING EXPERT ON WATER TREATMENT FACILITIES

As a senior sourcing expert on water treatment facilities and accessories, Hengshui Snowate Environmental Technology Co., Ltd. has extensive water treatment expertise, profound water treatment industry experience and a deep understanding of the water treatment industry purchasing demands. As a consequence, we are capable of providing one-stop purchase and technical support on water treatment facilities and accessories according to our customers' applications, thereby helping our customers to shorten the procurement cycle, reduce procurement costs and maximize economic benefits.

We integrate upstream supply chain products of the water treatment industry. In addition, we work with renowned suppliers and manufacturers. As a result, we can continuously supply high-quality water treatment components and systems for customers across the world to meet the needs of a Wide Range of Applications, Thereby Optimizing Water Resources and Promoting The Sustainable Development of The Global Environment.

|

The logo for Snowate, featuring the word "Snowate" in a white, sans-serif font. The letter "o" is replaced by a stylized white water droplet icon. The background is a dark blue with a subtle pattern of water ripples and droplets.

Snowate

布水管，布水器，罐体配件

Filter Nozzle Arms, Distributors, FRP Tank Accessories

- ◎ 布水管系列
Filter Nozzle Arms
- ◎ 布水器系列
Distributors
- ◎ 罐体配件系列
FRP Tank Accessories



所有布水器产品，如果在酸碱浓度较高的环境下使用，购买前请咨询本公司。

Please consult with us first if the distribution which you purchase if used in a high concentration of acid and base environment.

专业 创新









PROFESSION & INNOVATION



Type: H53-1, H53-2, H53-3, H53-4

Type: H85

Type: H135

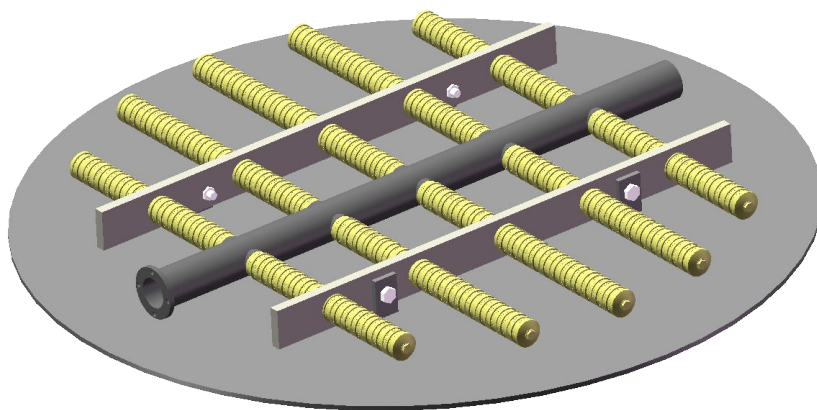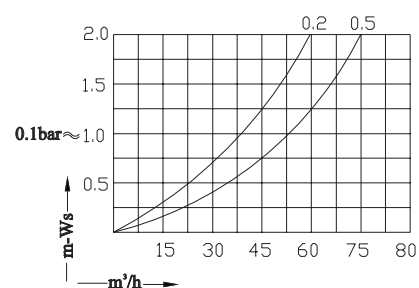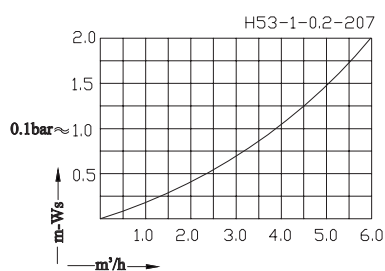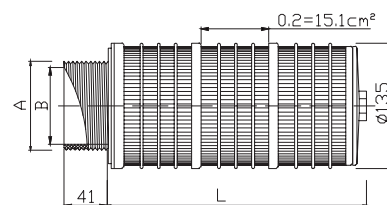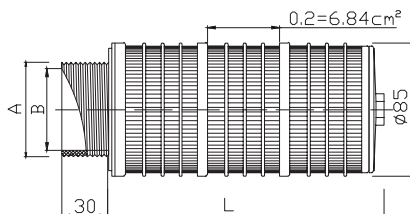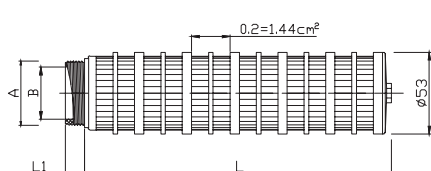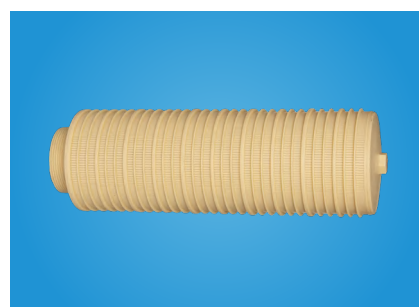

V42
V60
V80
V100
H53
H85
H135

型号 (Type)	A(mm)	B(mm)	L1(mm)	缝隙Slots(mm)	材质Material	L(mm)
H53-1	1¼"G	21	22	0.2/0.3/0.4/0.5	PP PPGV30S PVDF	207,271,303,335,+32...
H53-2	1"NPT/1"G	21	17			111,175,207,239, +32...
H53-3	3/4"NPT	18.5	17			111,175,207,239, +32...
H53-4	M30×2	19	17			111,175,207,239, +32...
H85	2"PT/2"NPT/2"G	50	30	0.2/0.5	PP/PVDF	73,126,179,232,285,+53...
	1.5"NPT/1.5"G	37	30			
H135	3"NPT/ 3"BSPT	72	41		PP/PVDF	173,248,323,398,473,+75..

PVC全焊式绕丝筛管可广泛应用于油、气、水井防沙，化工，环保工业中，其在水处理工业中的地位尤其突出，是各类水资源及收集树脂过滤筛管中应用最广泛的一种。

PVC Sonic-welded screens can be widely used in the oil,gas,water wells sand prevention, chemical,environmental industries, the position in the water treatment industry is particular highlight.

产品优势:

1、该筛管由改性PVC材料研制而成，具有高强度，高韧性，耐酸碱，抗腐蚀等优点。


2、梯形丝持续绕组在呈圆周式排列的支撑杆上形成持续的高密度均匀缝隙，保证了筛管的开口面积百分比和无堵塞性，避免了沉淀物的高密度堆积造成的阻塞，从而为提高生产效率或延长设备的使用寿命提供了保证。

3、Vee字形开口的设计形式保证了液体过滤的顺畅性。

4、绕丝与所有纵向支撑杆之间均通过焊接组合，使整根筛管形成不可分割的整体，结实耐用，工作寿命周期更长。

5、根据实际需求设计的纵向支撑杆排列，及筛管的连续性缝隙形式，使得该产品具备更高的抗压性能。

6、该成品的各项优秀性能提高了设备的过滤效率和使用周期，使得该产品成为液体过滤设备中佼佼者。

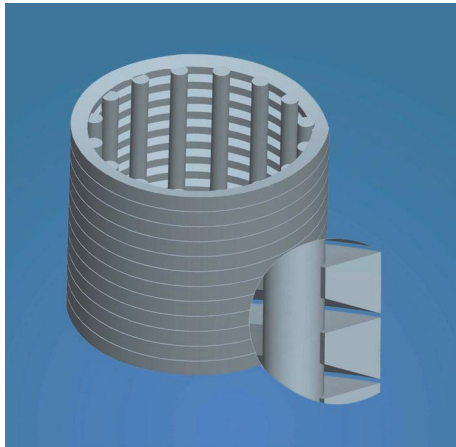

Product Merits:

1. UPVC Sonic-welded screen has good corrosion resistant from salts and gases commonly found in either salt or flesh water, more economical than metal screens.

2. The wedge wire wind around the cylindrical rod forms continuous, high-density uniform Vee shaped gaps, ensure the open area without blockage, and can avoid the accumulation of sediment caused by blocking high-density, so as to increase productivity or guarantee to extend the life of equipment.

3. The design of the Vee shaped gap ensures the liquid can be filter unobstructed.

4. The wedge wire and all the vertical rods are connected by sonic-weld. It's strong, durable, and has longer working life.

5. The design of the vertical rod arrangement can be changed according to the actual requirements; combine the continuous screen, making the product has a higher compression performance.

6. Its excellent performance improves the equipment's filter efficiency and the life cycle, makes it to become the leader in liquid equipment



V42



V60



V80



V100

型号	外径 O. D.	内径 I. D.	连接方式 Connect	缝隙 Slots (mm)	长度
V42	42mm	30mm	G3/4" / G1" / NPT1"	0.15/0.2/0.25/	自选 Optional
V60	60mm	46mm	G2" / NPT2"	0.3/0.35/0.4/	
V80	80mm	66mm	G3" / NPT3"	0.45/0.5/.....	
V100	100mm	86mm	G4" / NPT4"	Any slots available.	



本产品已获两项国家发明专利 专利号为:200710169538.8 和 200710164499.X

The product has got 2 patent certifications. The patent No.: 200710169538.8 200710164499.X

阿图祖上集散
Autotrol top distributor
H2801-B (3/4")





材质 (Material): ABS
缝隙 (Slots): 0.25mm
中心管A (Tube)
3/4": (26.7mm)
L: 76mm

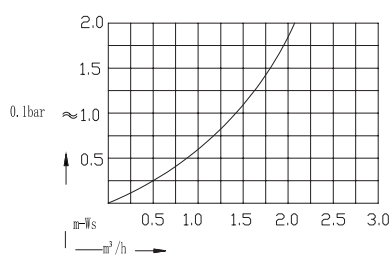

富来克上集散
Fleck top distributor
H2805 (3/4")





材质 (Material): ABS/PVC
缝隙 (Slots): 0.25mm
中心管A (Tube)
3/4": (26.7mm)
L: 76mm

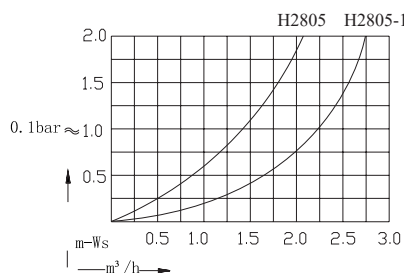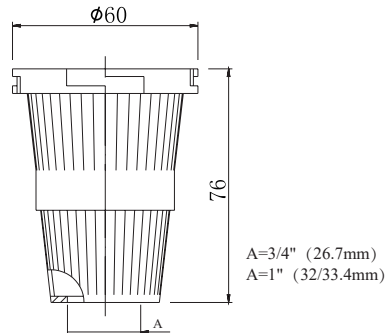

下集散
bottom distributor
H2807 (3/4")



材质 (Material): ABS/PVC
缝隙 (Slots): 0.25mm
中心管A (Tube)
3/4": (26.7mm)
L: 122mm

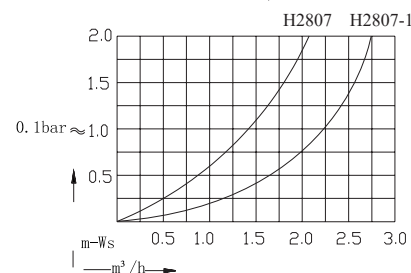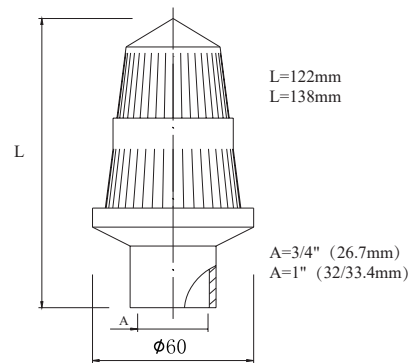

普通上下集散
1" top and bottom distributor

H2805-1(1")



材质 (Material): ABS
缝隙 (Slots): 0.25mm
中心管 (Tube)
A=1": (32mm/ 33.4mm)
L=76mm

H2807-1(1")



材质 (Material): ABS
缝隙 (Slots): 0.25mm
中心管 (Tube)
A=1": (32mm/33.4mm)
L=138mm

香菇头及加长香菇头系列 Distributor for 6“-12” Vessels

H2809A H2809B H2810



材质 (Material):ABS/PP
缝隙 (Slots):0.25mm

中心管A (Tube)
3/4": (26.7mm)
1": (32mm/ 33.4mm)

材质 (Material):ABS/PP
缝隙 (Slots):0.25mm

中心管A (Tube)
3/4": (26.7mm)
1": (32mm/33.4mm)

H2809AL H2809BL H2810L




材质 (Material):ABS/PP
缝隙 (Slots):0.25mm


中心管A (Tube)
3/4": (26.7mm)
1": (32mm/ 33.4mm)

材质 (Material):ABS/PP
缝隙 (Slots):0.25mm


中心管A (Tube)
3/4": (26.7mm)
1": (32mm/33.4mm)

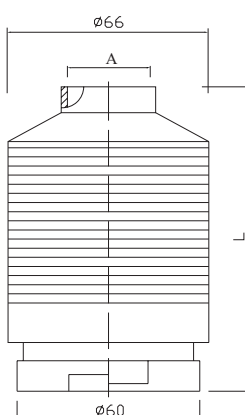



H2809A
L=100mm

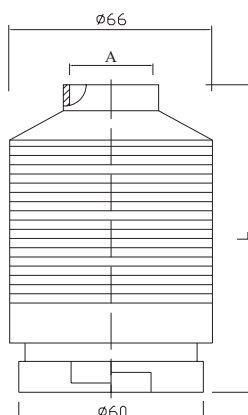

H2809B
L=100mm

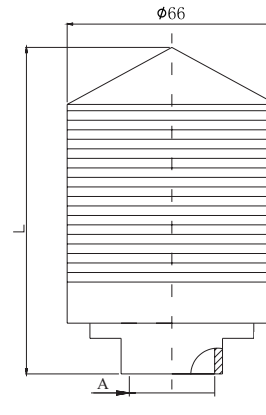

H2810
L=123mm


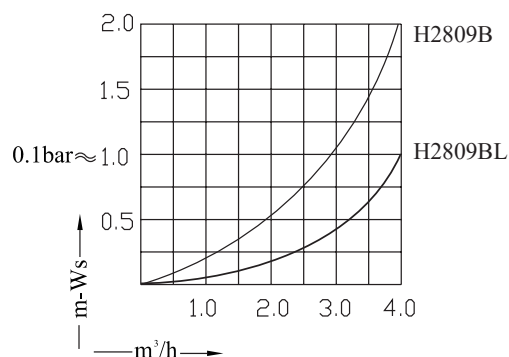
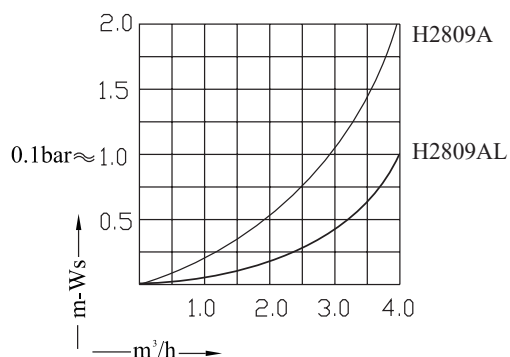


普通上布水器 中心管A=1 $\frac{1}{4}$ / 1.5 " (42/40/50/48.3mm) 缝隙Slots : 0.2/0.5mm

1 $\frac{1}{4}$ / 1.5" top distributor




H182A H182AN

配Fleck阀 suit for Fleck valve

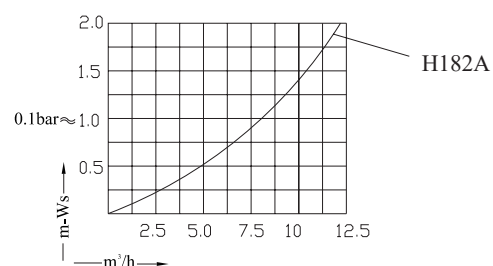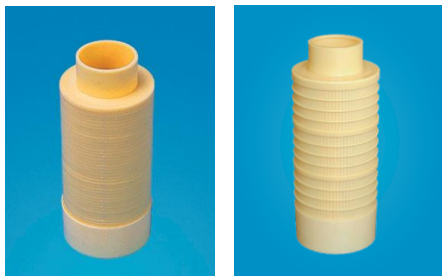



H182B H182BN

配润新阀 suit for Runxin valve

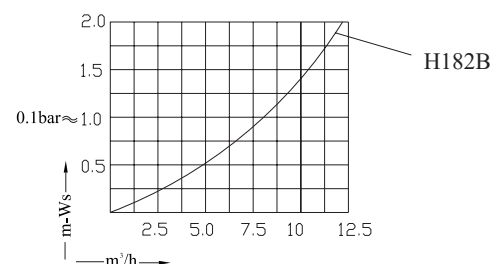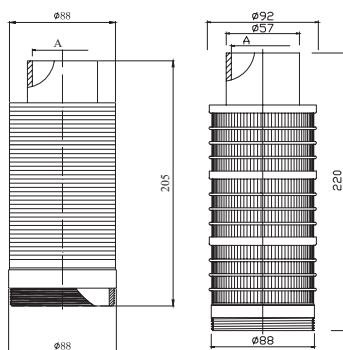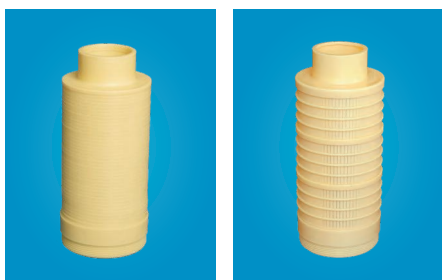

H182-1

配阿图祖麦能阀 suit for Autotrol Nylon valve

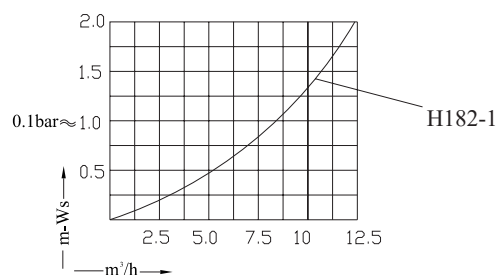

富来克3150上布水器 中心管A=2 "(63mm)


top screen for fleck 3150 valve

H182AL-1 (2")



H182ANL-1 (2")



有不锈钢螺钉
with stainless screw

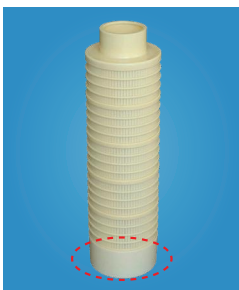

无不锈钢螺钉，耐腐蚀
without SS screw



润新阀用上布水器

top screen for Runxin valve

H182BL-1

tube A=1.5"(48.3/50mm)

H182BL-2

tube A=2"(60.3/63mm)

H182BNL-1

tube A=1.5"(48.3/50mm)

H182BNL-2


tube A=2"(60.3/63mm)




有不锈钢螺钉
with stainless screw






Thread

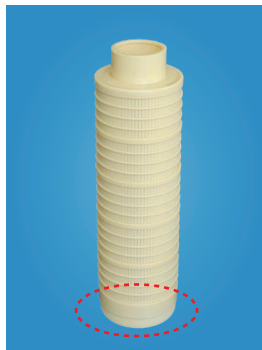

无不锈钢螺钉，耐腐蚀
without SS screw

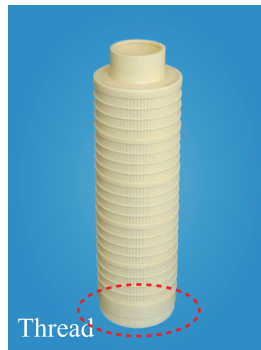



Thread

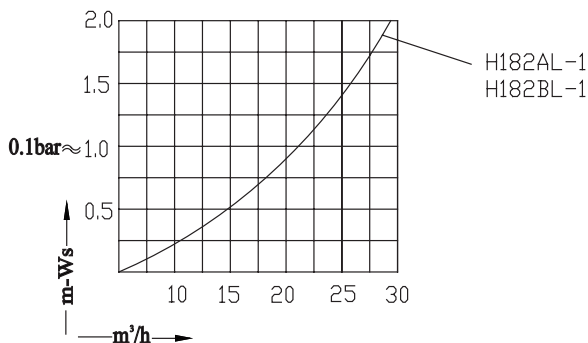

Type: H2804



材质 (Material): PP
 缝隙 (Slots): 0.2mm
 插管口 tube(ϕA):
 H2804: A=42/40/50/48.3mm
 无不锈钢螺钉, 耐腐蚀
 without SS screw

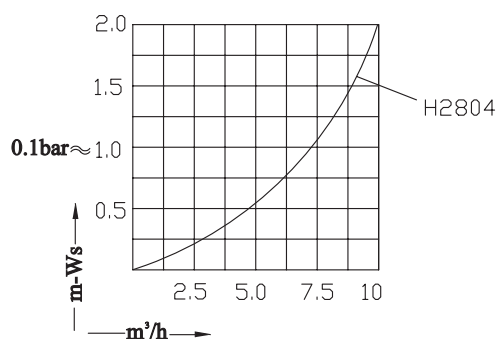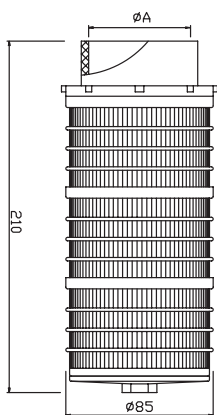

Type: H2808




材质 (Material): ABS
 缝隙 (Slots): 0.25/0.5mm
 插管口 tube(ϕA):
 H2808/H2808L1/H2808L2:
 A=42/40/50/48.3mm


Type: H2808L1





Type: H2808L2

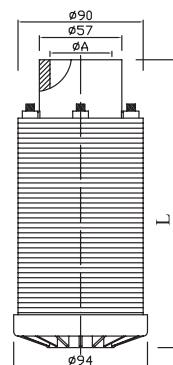

L(H2808)=210
 L(H2808L1)=270
 L(H2808L2)=370


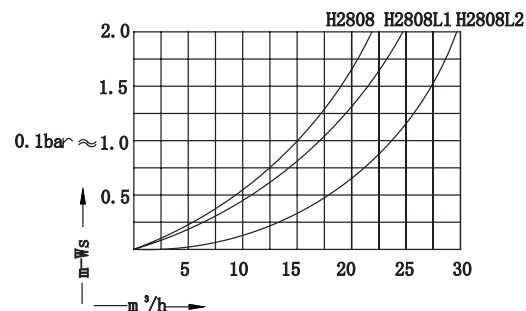


H2813N

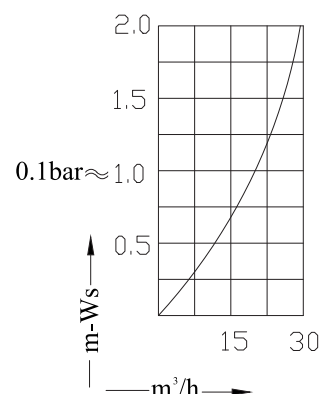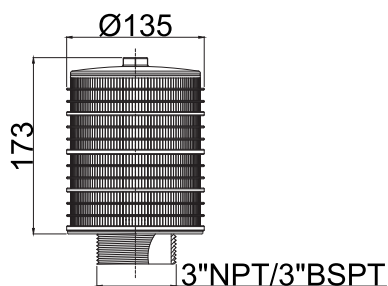



材质 (Material) : PP
缝隙 (Slots) : 0.2/0.5mm

H2814N

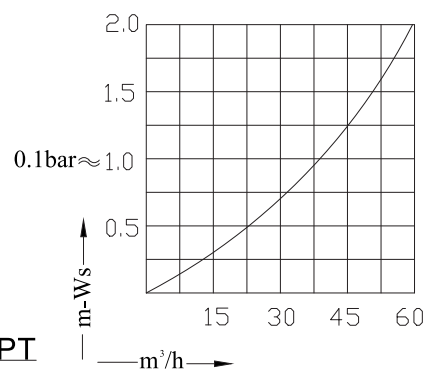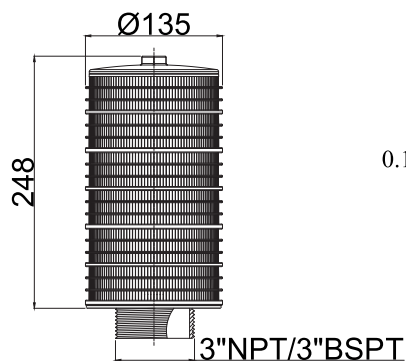





材质 (Material) : PP
缝隙 (Slots) : 0.2/0.5mm

H2815N

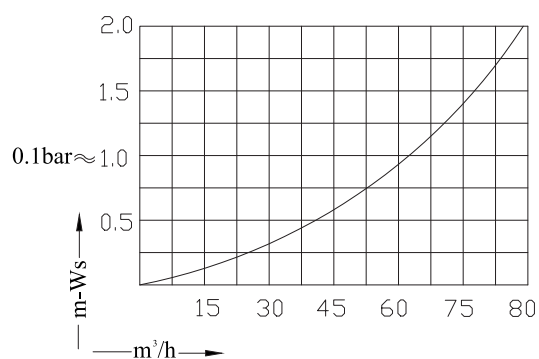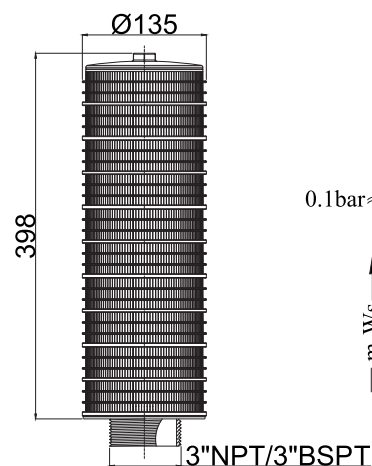

材质 (Material) : PP
缝隙 (Slots) : 0.2/0.5mm

A series

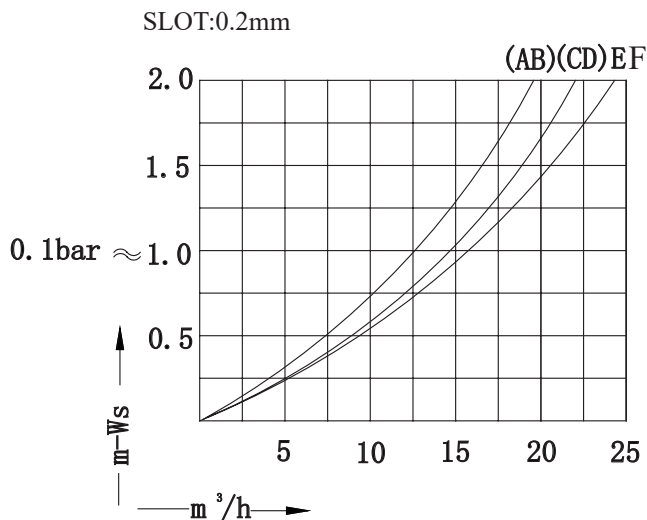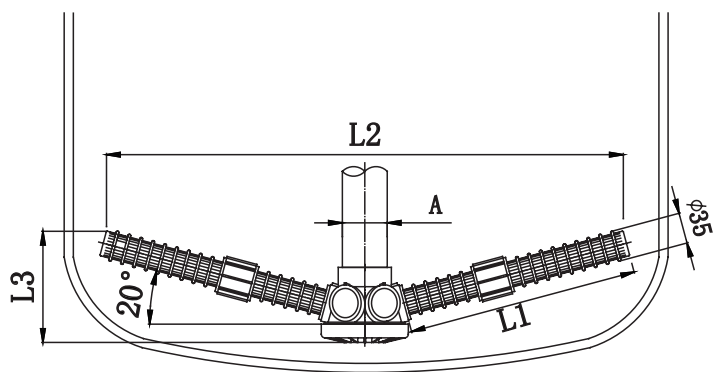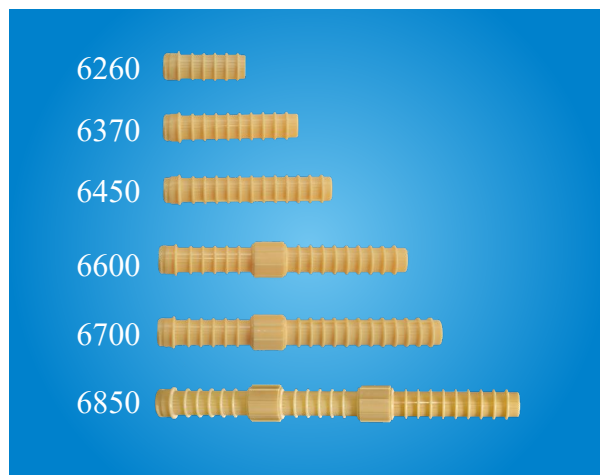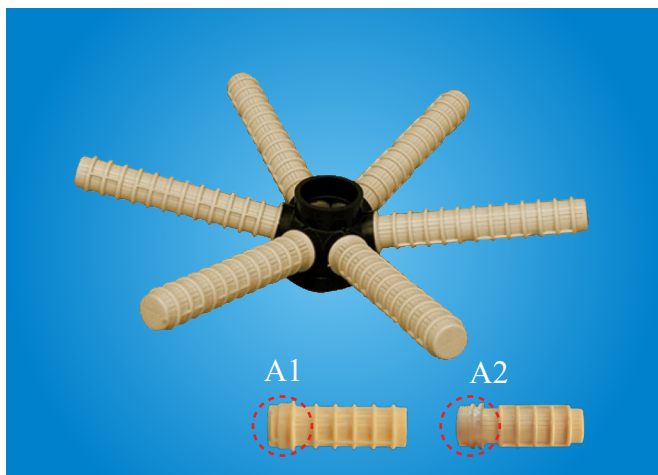



型号 Type		尺寸 Dimension(mm)				罐体尺寸 Tank Size Inches(mm)	流量 Flow	罐体上开口 Top Opening
		A	L1	L2	L3			
HU6260A1	HU6260A2	1.25" (40/42)	82	145	71	12-16"(300-400mm)	A	4"-8UN
HU6370A1	HU6370A2		142	365	83	18-21"(450-550mm)	B	
HU6450A1	HU6450A2		182	440	95	24"(600mm)	C	
HU6600A1	HU6600A2	1.5" (48.3/50)	266	610	105	30"(750mm)	D	
HU6700A1	HU6700A2		308	690	114	36-42"(900-1000mm)	E	
HU6850A1	HU6850A2		400	870	142	40-48"(1000-1200mm)	F	

Note:


A1系列支管采用卡口式，A2系列支管采用螺纹式。

The laterals: A1=quick lock A2=thread


B series

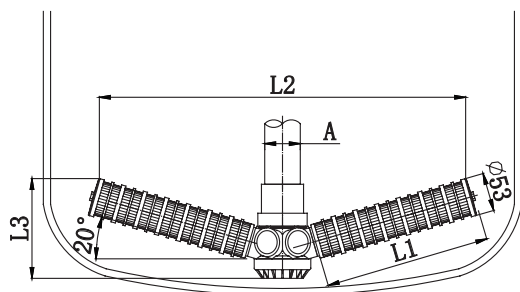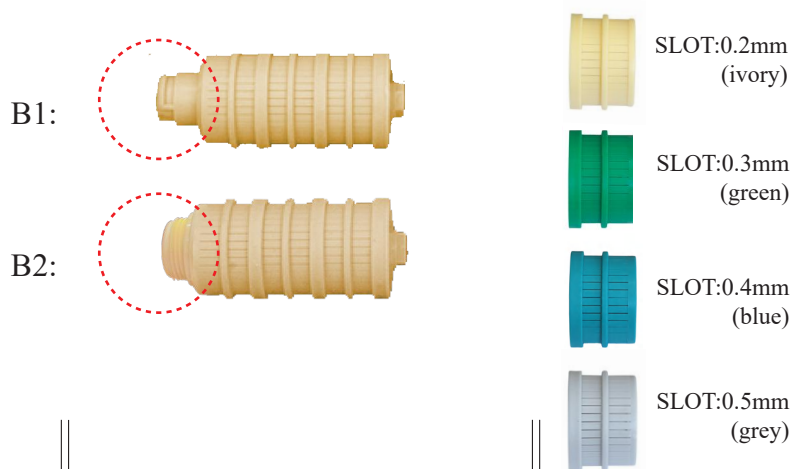

SLOT:0.2/0.3mm

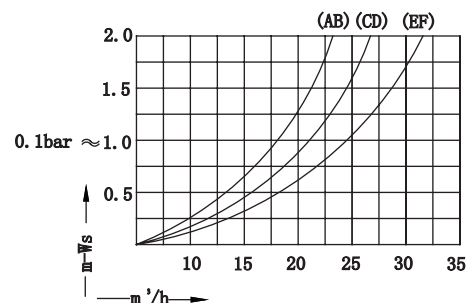

SLOT:0.4/0.5mm


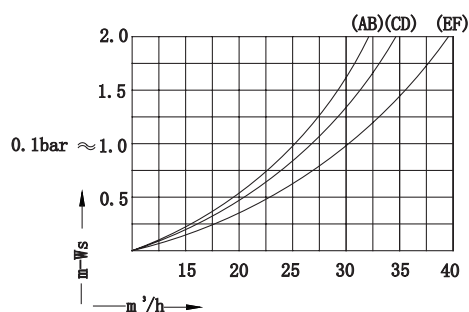


型号 Type		尺寸 Dimension (mm)				罐体尺寸 Tank Size	流量	罐体上开口
		A	L1	L2	L3	Inches (mm)	Flow	Top Opening
HU6260B1	HU6260B2	1.25" (40/42)	111	296	110	12-16" (300-400mm)	A	4"-8UN
HU6370B1	HU6370B2		174	416	125	18-21" (450-550mm)	B	
HU6450B1	HU6450B2	1.5" (48.3/50)	205	455	135	24" (600mm)	C	
HU6600B1	HU6600B2		268	575	165	30" (750mm)	D	
HU6700B1	HU6700B2	2" (60/63)	331	710	175	36" (900mm)	E	
HU6850B1	HU6850B2		394	835	185	40-48" (1000-1200mm)	F	


Note:

B1系列支管采用卡口式，B2系列支管采用螺纹式。



The laterals: B1=quick lock B2=thread

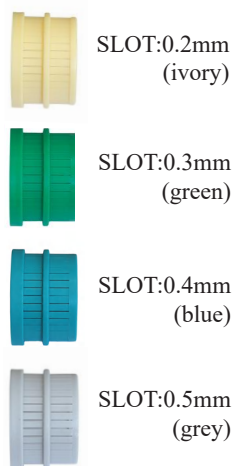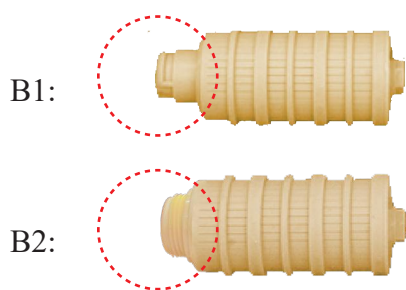

SLOT:0.2/0.3mm

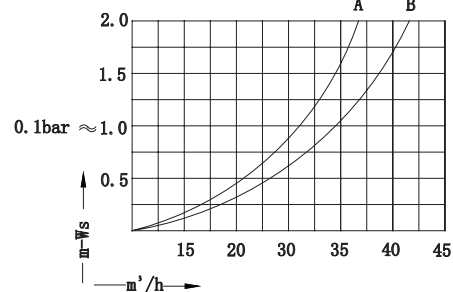

SLOT:0.4/0.5mm

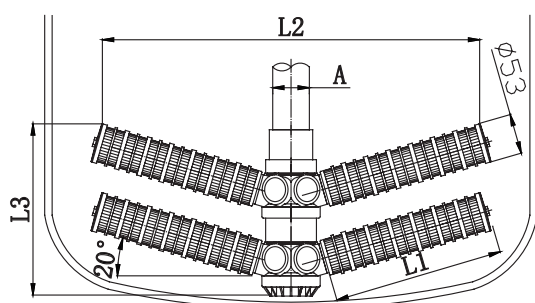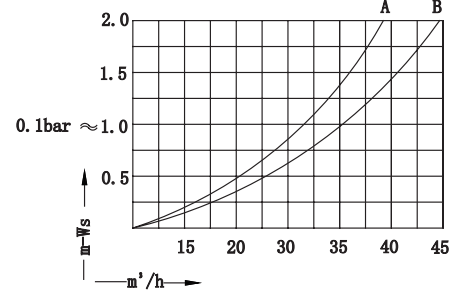

型号 Type	尺寸 Dimension (mm)				罐体尺寸 Tank Size	流量	罐体上开口
	A	L1	L2	L3	Inches (mm)	Flow	Top Opening
HU6700B1-2 HU6700B2-2	60/63	331	710	300	36"-42" (900-1000mm)	A	4"-8UN
HU6850B1-2 HU6850B2-2		394	835	310	48"-63" (1200-1600mm)	B	

Note:

B1系列支管采用卡口式，B2系列支管采用螺纹式。

The laterals: B1=quick lock B2=thread



H5671BE
(ELBOW CONNECT)



H5671BS
(STRAIGHT CONNECT)




H5671BU
(UNION CONNECT)




H5671BU-V
(UNION CONNECT)
带负压保护器（见P27页）
with vacuum breaker (refer to P27)



4"罐体接口紧固工具
Tighten tool for 4" FRPopening

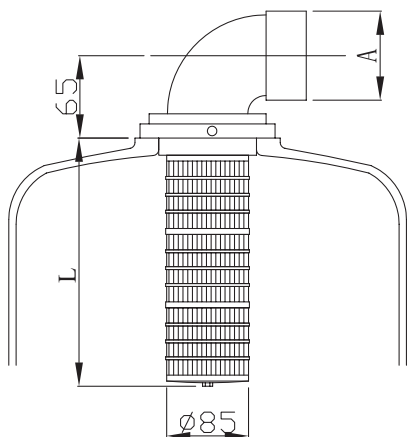

SLOT:0.2/0.5mm

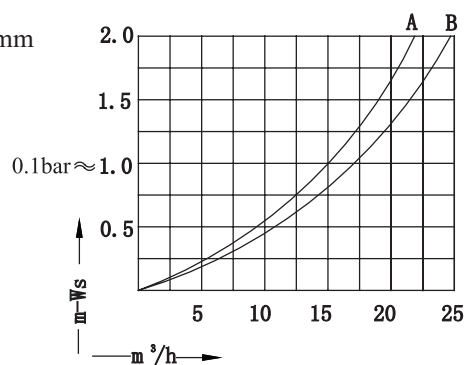

型号 Type	外管连接方式	尺寸 (mm)		罐体尺寸 Tank Size	流量	罐体上开口
	Connect method	A	L	Inches (mm)	Flow	Top Opening
H5671A/H5671B	E: Elbow	60/63	210	12"-36" (300-900mm)	A	4"-8UN
H5671AL/H5671BL	S: Straight U: Union		316	36"-48" (900-1200mm)	B	

A系与B系所采用的4"罐口连接件不同
The 4" adaptor is difference between A series and B series

A:



B:





(ELBOW CONNECT)



(STRAIGHT CONNECT)




(UNION CONNECT)





4"罐体接口紧固工具
Tighten tool for 4" FRPopening


A1:



A2:

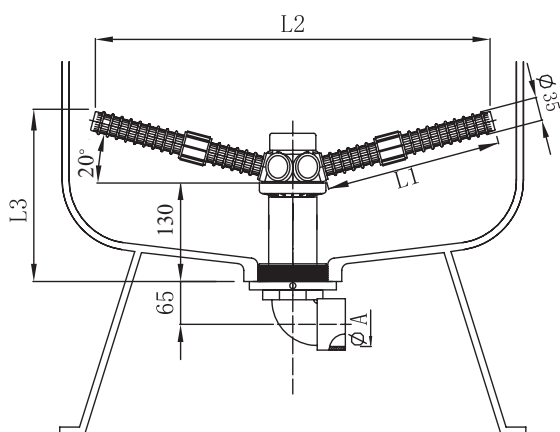

SLOT:0.2mm

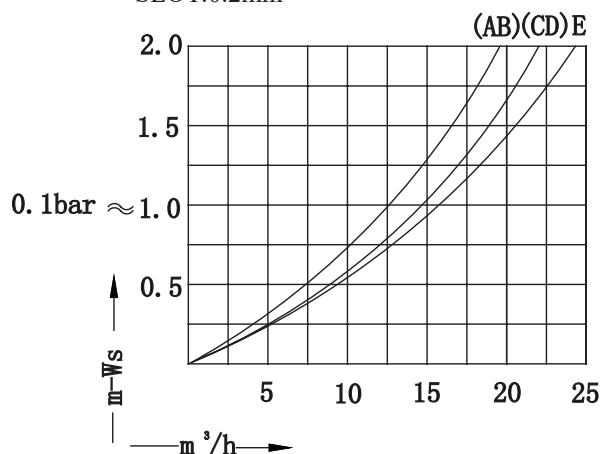

型号 Type		尺寸 Dimension(mm)				罐体尺寸 Tank Size Inches(mm)	流量 Flow	罐体上开口 Top Opening
		A	L1	L2	L3			
HD6260A1	HD6260A2	60/63	82	145	158	12-16"(300-400mm)	A	4"-8UN
HD6370A1	HD6370A2		142	365	172	18-21"(450-550mm)	B	
HD6450A1	HD6450A2		182	440	178	24"(600mm)	C	
HD6600A1	HD6600A2		266	610	198	30"(750mm)	D	
HD6700A1	HD6700A2		308	690	198	36-42"(900-1000mm)	E	
HD6850A1	HD6850A2		400	870	226	40-48"(1000-1200mm)	F	

外管连接方式可选：1、弯头 2、直接 3、活接由令 无特殊说明，默认为弯头连接

Connect Method of Outer Pipe with water distributor: 1,E: Elbow Connect. 2. S: Straight Connect. 3.U: Union Connect.

No special description, would be elbow connect

Note:

A1系列支管采用卡口式，A2系列支管采用螺纹式。

The laterals: A1=quick lock A2=thread




(ELBOW CONNECT)




(STRAIGHT CONNECT)




(UNION CONNECT)



B1:



B2:

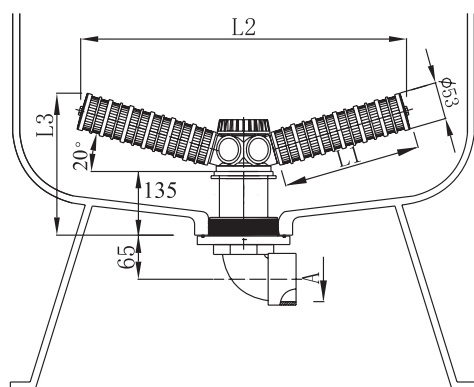


外管连接方式可选：1、弯头 2、直接 3、活接由令无特殊说明，默认为弯头连接


Connect Method of Outer Pipe with water distributor: 1,E: Elbow Connect. 2. S: Straight Connect. 3.U: Union Connect.

No special description, would be elbow connect

SLOT:0.2/0.3mm

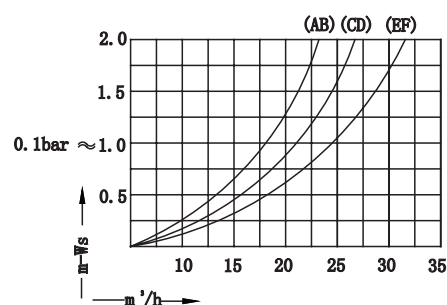

SLOT:0.4/0.5mm

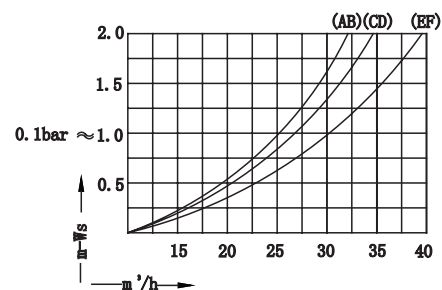

型号 Type		尺寸 Dimension (mm)				罐体尺寸 Tank Size	流量	罐体下开口
		A	L1	L2	L3	Inches (mm)	Flow	Bottom Opening
HD6260B1	HD6260B2	60/63	111	296	156	12-16" (300-400mm)	A	4"-8UN
HD6370B1	HD6370B2		174	416	176	18-21" (450-550mm)	B	
HD6450B1	HD6450B2		205	455	186	24" (600mm)	C	
HD6600B1	HD6600B2		268	575	203	30" (750mm)	D	
HD6700B1	HD6700B2		331	710	223	36" (900mm)	E	
HD6850B1	HD6850B2		394	835	233	40"-48" (1000-1200mm)	F	

Note:

B1系列支管采用卡口式，B2系列支管采用螺纹式。

The laterals: B1=quick lock B2=thread



(ELBOW CONNECT)




(STRAIGHT CONNECT)



(UNION CONNECT)


型号 Type		尺寸 Dimension (mm)				罐体尺寸 Tank Size	流量	罐体下开口
		A	L1	L2	L3	Inches (mm)	Flow	Bottom Opening
HD6260B1F	HD6260B2F	60/63	111	296	156	12-16" (300-400mm)	A	4"-8UN
HD6370B1F	HD6370B2F		174	416	176	18-21" (450-550mm)	B	
HD6450B1F	HD6450B2F		205	455	186	24" (600mm)	C	
HD6600B1F	HD6600B2F		268	575	203	30" (750mm)	D	
HD6700B1F	HD6700B2F		331	710	223	36" (900mm)	E	
HD6850B1F	HD6850B2F		394	835	233	40"-48" (1000-1200mm)	F	

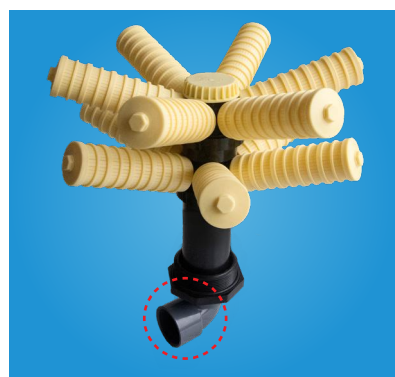

(ELBOW CONNECT)



(STRAIGHT CONNECT)

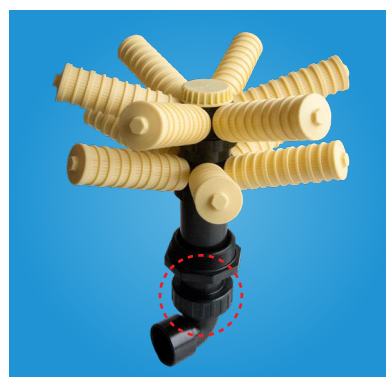



(UNION CONNECT)

型号 Type		尺寸 Dimension (mm)				罐体尺寸 Tank Size	流量	罐体下开口
		A	L1	L2	L3	Inches (mm)	Flow	Bottom Opening
HD6700B1-2	HD6700B2-2	60/63	331	710	348	36"-40" (900-1000mm)	A	4"-8UN
HD6850B1-2	HD6850B2-2		394	835	358	48"-63" (1200-1600mm)	B	


Note:

B1系列支管采用卡口式，B2系列支管采用螺纹式。


The laterals: B1=quick lock B2=thread

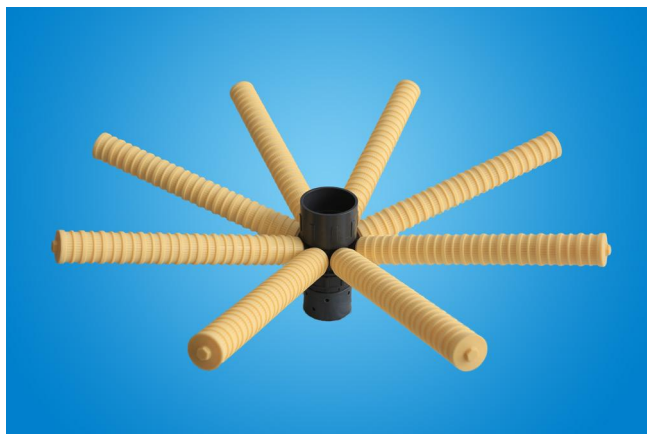


SLOT:0.2/0.3/0.4/0.5mm

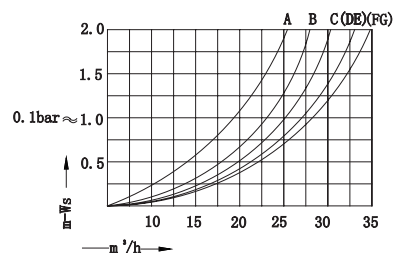


型号 Type	尺寸 Dimension(mm)				罐体尺寸 Tank Size Inches(mm)	流量 Flow	罐体上开口 Top Opening
	A	L1	L2	L3			
HU5669B2-1	60/63 89/90	205	490	205	24" (600mm)	A	6" FLG
HU5670B2-1		268	615	225	30" (750mm)	B	
HU5672B2-1		300	690	235	36" (900mm)	C	
HU5673B2-1		363	810	255	42" (1000mm)	D	
HU5674B2-1		426	930	275	48" (1200mm)	E	
HU5675B2-1		489	1050	295	60" (1500mm)	F	
HU5676B2-1		552	1170	305	63-80" (1600-2000mm)	G	




SLOT:0.2/0.3/0.4/0.5mm



型号 Type	尺寸 Dimension(mm)				罐体尺寸 Tank Size Inches(mm)	流量 Flow	罐体上开口 Top Opening
	A	L1	L2	L3			
HU5669B2-2	89/90	205	490	342	24" (600mm)	A	6" FLG
HU5670B2-2		268	615	352	30" (750mm)	B	
HU5672B2-2		300	690	357	36" (900mm)	C	
HU5673B2-2		363	810	367	42" (1000mm)	D	
HU5674B2-2		426	930	377	48" (1200mm)	E	
HU5675B2-2		489	1050	387	60" (1500mm)	F	
HU5676B2-2		552	1170	407	63-80" (1600-2000mm)	G	

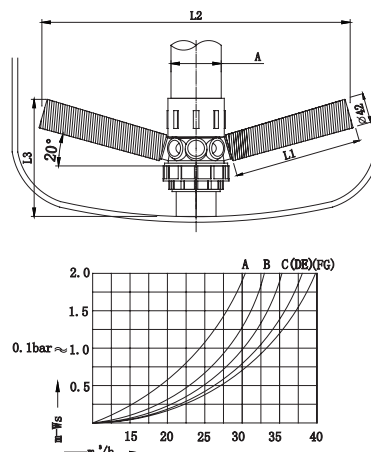

型号 Type	尺寸 Dimension (mm)				罐体尺寸 Tank Size	流量	绕丝管缝隙	罐体上开口
	A	L1	L2	L3	Inches (mm)	Flow	Slot (mm)	Top Opening
HU5669C-1	60/63 89/90	205	490	205	24" (600mm)	A	0.2/0.25/	6"FLG
HU5670C-1		268	615	225	30" (750mm)	B	0.3/0.35/	
HU5672C-1		300	690	235	36" (900mm)	C	0.4/0.45/	
HU5673C-1		363	810	255	42" (1000mm)	D	0.5/	
HU5674C-1		426	930	275	48" (1200mm)	E		
HU5675C-1		489	1050	295	60" (1500mm)	F	Any slots available.	
HU5676C-1		552	1170	305	63-80" (1600-2000mm)	G		

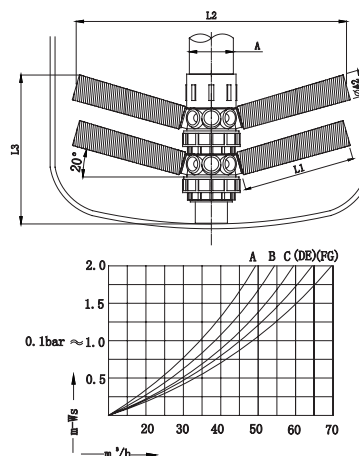

型号 Type	尺寸 Dimension (mm)				罐体尺寸 Tank Size	流量	绕丝管缝隙	罐体上开口
	A	L1	L2	L3	Inches (mm)	Flow	Slot (mm)	Top Opening
HU5669C-2	89/90	205	490	342	24" (600mm)	A	0.2/0.25/	6"FLG
HU5670C-2		268	615	352	30" (750mm)	B	0.3/0.35/	
HU5672C-2		300	690	357	36" (900mm)	C	0.4/0.45/	
HU5673C-2		363	810	367	42" (1000mm)	D	0.5/	
HU5674C-2		426	930	377	48" (1200mm)	E		
HU5675C-2		489	1050	387	60" (1500mm)	F	Any slots available.	
HU5676C-2		552	1170	407	63-80" (1600-2000mm)	G		



H173



H173N





无不锈钢螺钉，耐腐蚀
without SS screw

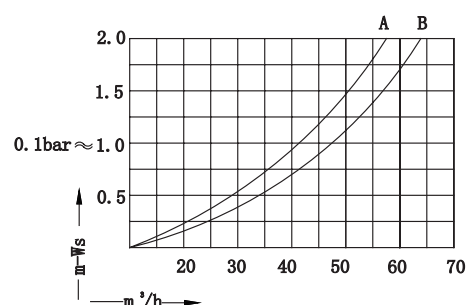



型号 Type	尺寸 Dimension(mm)			罐体尺寸 Tank Size Inches(mm)	流量 Flow	支管缝隙 Slot(mm)	罐体上开口 Top Opening
	A	L1	L2				
H173	89/90	360	215	24"-48" (600-1200mm)	A	0.2/0.5	6" FLG
H173L	110/114 3"NPT/3"BSPT	455	310	48"-80" (1200-2000mm)	B		
H173N	4"NPT/4"BSPT	393	248	24"-48" (600-1200mm)	A		
H173NL	4"UN	543	398	48"-80" (1200-2000mm)	B		

H176

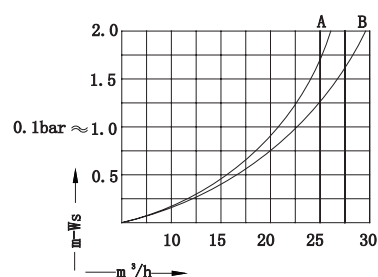

型号 Type	尺寸 Dimension(mm)			罐体尺寸 Tank Size Inches(mm)	流量 Flow	支管缝隙 Slot(mm)	罐体上开口 Top Opening
	A	L1	L2				
H176	89/90 110/114 3"NPT/3"BSPT	325	180	24"-48" (600-1200mm)	A	0.2/0.5	6" FLG
H176L-1	4"NPT/4"BSPT 4"UN	430	285	48"-63" (1200-1600mm)	B		

HD5680

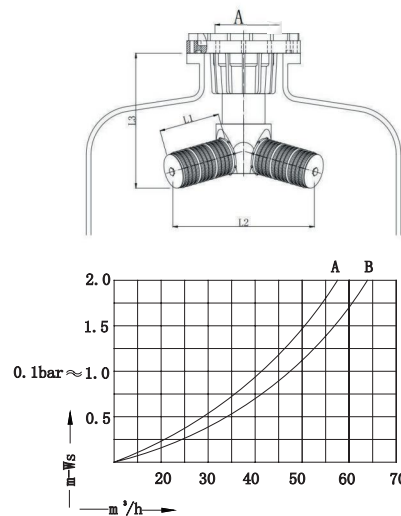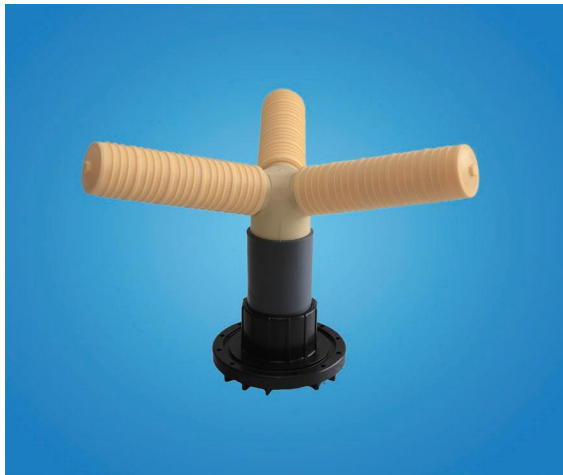


型号 Type	尺寸 Dimension (mm)				罐体尺寸 Tank Size Inches (mm)	流量 Flow	支管缝隙 Slot (mm)	罐体上开口 Top Opening
	A	L1	L2	L3				
HD5680	89/90 110/114 3"NPT/3" BSPT	180	550	295	36-48" (900-1200mm)	A	0.2/0.5	6"FLG
HD5680L	4"NPT/4" BSPT 4"UN				48-80" (1200-2000mm)	B		

备注： 流量加大, 法兰开口尺寸请选择4"


If large flow rate, you'd better choose 4" interface.

3900阀用6"法兰式上布水器 top distributor for Fleck 3900


H171

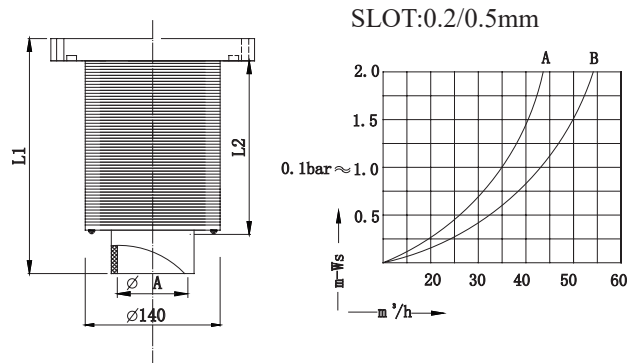


型号 (Type)	尺寸(Dimension) mm			流量 (Flow)	适用 罐 体 (Tank Size)	罐体开口 (Top Opening)
	A	L1	L2			
H171	90	290	220	A	36"-63"(900-1600mm)	6"FLG
H171L	90	510	440	B	63"-80"(1600-2000mm)	6"FLG




SLOT:0.2/0.3/0.4/0.5mm

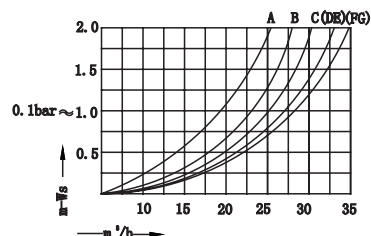

型号 Type	尺寸 Dimension(mm)				罐体尺寸 Tank Size Inches(mm)	流量 Flow	罐体上开口 Top Opening
	A	L1	L2	L3			
HD5669B2-1	89/90 110/114 3" NPT/3" BSPT 4" NPT/4" BSPT 4" UN	205	490	320	24" (600mm)	A	6" FLG
HD5670B2-1		268	615	340	30" (750mm)	B	
HD5672B2-1		300	690	355	36" (900mm)	C	
HD5673B2-1		363	810	375	42" (1000mm)	D	
HD5674B2-1		426	930	395	48" (1200mm)	E	
HD5675B2-1		489	1050	415	60" (1500mm)	F	
HD5676B2-1		552	1170	430	63-80" (1600-2000mm)	G	




SLOT:0.2/0.3/0.4/0.5mm

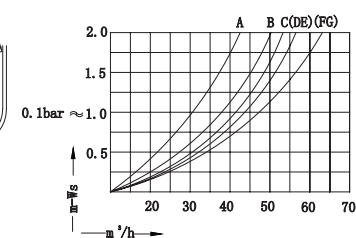


型号 Type	尺寸 Dimension(mm)				罐体尺寸 Tank Size Inches(mm)	流量 Flow	罐体上开口 Top Opening
	A	L1	L2	L3			
HD5669B2-2	89/90 110/114 3" NPT/3" BSPT 4" NPT/4" BSPT 4" UN	205	490	450	24" (600mm)	A	6" FLG
HD5670B2-2		268	615	460	30" (750mm)	B	
HD5672B2-2		300	690	465	36" (900mm)	C	
HD5673B2-2		363	810	475	42" (1000mm)	D	
HD5674B2-2		426	930	485	48" (1200mm)	E	
HD5675B2-2		489	1050	495	60" (1500mm)	F	
HD5676B2-2		552	1170	510	63-80" (1600-2000mm)	G	

备注： 流量加大, 法兰开口尺寸请选择4"


If large flow rate, you'd better choose 4" interface.




SLOT:0.2/0.3/0.4/0.5mm



型号 Type	尺寸 Dimension(mm)				罐体尺寸 Tank Size Inches(mm)	流量 Flow	罐体上开口 Top Opening
	A	L1	L2	L3			
HD5669D2-1	89/90 110/114 3" NPT/3" BSPT 4" NPT/4" BSPT 4" UN	205	490	320	24" (600mm)	A	6" FLG
HD5670D2-1		268	615	340	30" (750mm)	B	
HD5672D2-1		300	690	355	36" (900mm)	C	
HD5673D2-1		363	810	375	42" (1000mm)	D	
HD5674D2-1		426	930	395	48" (1200mm)	E	
HD5675D2-1		489	1050	415	60" (1500mm)	F	
HD5676D2-1		552	1170	430	63-80" (1600-2000mm)	G	




SLOT:0.2/0.3/0.4/0.5mm





型号 Type	尺寸 Dimension(mm)				罐体尺寸 Tank Size Inches(mm)	流量 Flow	罐体上开口 Top Opening
	A	L1	L2	L3			
HD5669D2-2	89/90 110/114 3" NPT/3" BSPT 4" NPT/4" BSPT 4" UN	205	490	450	24" (600mm)	A	6" FLG
HD5670D2-2		268	615	460	30" (750mm)	B	
HD5672D2-2		300	690	465	36" (900mm)	C	
HD5673D2-2		363	810	475	42" (1000mm)	D	
HD5674D2-2		426	930	485	48" (1200mm)	E	
HD5675D2-2		489	1050	495	60" (1500mm)	F	
HD5676D2-2		552	1170	510	63-80" (1600-2000mm)	G	

备注： 流量加大, 法兰开口尺寸请选择4"

If large flow rate, you'd better choose 4" interface.

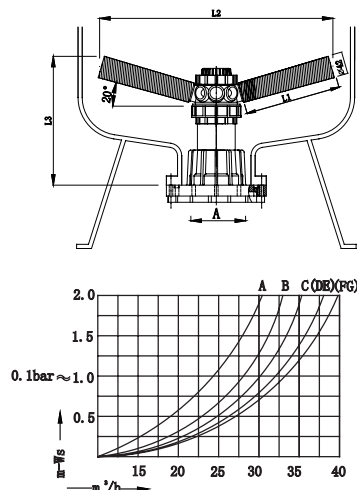


型号 Type	尺寸 Dimension (mm)				罐体尺寸 Tank Size	流量	绕丝管缝隙	罐体下开口
	A	L1	L2	L3	Inches (mm)	Flow	Slot (mm)	Bottom Opening
HD5669C-1	110/114 4" NPT/4" BSPT 4" UN	205	490	320	24" (600mm)	A	0.2/0.25/	6" FLG
HD5670C-1		268	615	340	30" (750mm)	B	0.3/0.35/	
HD5672C-1		300	690	355	36" (900mm)	C	0.4/0.45/	
HD5673C-1		363	810	375	42" (1000mm)	D	0.5/	
HD5674C-1		426	930	395	48" (1200mm)	E		
HD5675C-1		489	1050	415	60" (1500mm)	F	Any slots available.	
HD5676C-1		552	1170	430	63-80" (1600-2000mm)	G		

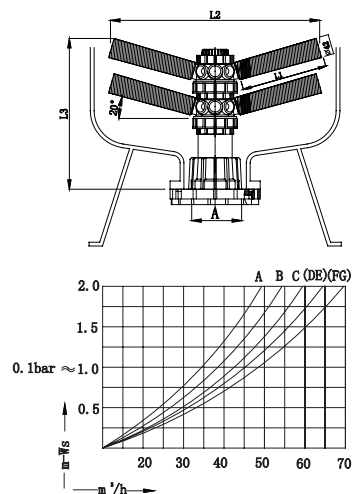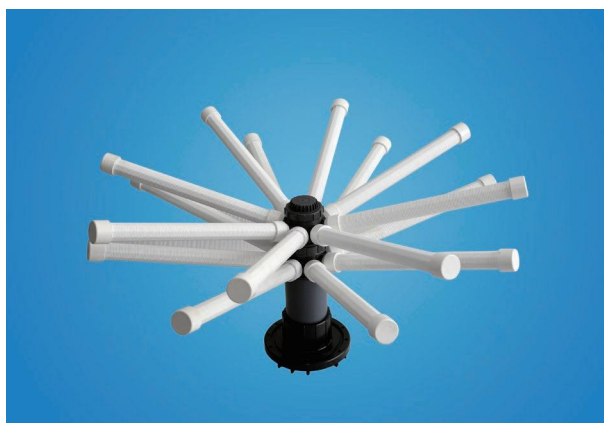


型号 Type	尺寸 Dimension (mm)				罐体尺寸 Tank Size	流量	绕丝管缝隙	罐体下开口
	A	L1	L2	L3	Inches (mm)	Flow	Slot (mm)	Bottom Opening
HD5669C-2	110/114 4" NPT/4" BSPT 4" UN	205	490	450	24" (600mm)	A	0.2/0.25/	6" FLG
HD5670C-2		268	615	460	30" (750mm)	B	0.3/0.35/	
HD5672C-2		300	690	465	36" (900mm)	C	0.4/0.45/	
HD5673C-2		363	810	475	42" (1000mm)	D	0.5/	
HD5674C-2		426	930	485	48" (1200mm)	E		
HD5675C-2		489	1050	495	60" (1500mm)	F	Any slots available.	
HD5676C-2		552	1170	510	63-80" (1600-2000mm)	G		

备注： 流量加大, 法兰开口尺寸请选择4"

If large flow rate, you'd better choose 4" interface.












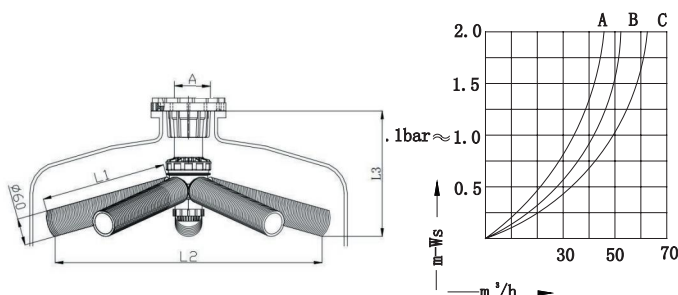


型号 Type	尺寸 Dimension (mm)				罐体尺寸 Tank Size Inches (mm)	流量 Flow	绕丝管缝隙 Slot (mm)	罐体上/下开口 Top/Bottom Opening
	A	L1	L2	L3				
HD5651-1	110/114 4" NPT/4" BSPT 4" UN	552	1170	500	60"-63"(1500-1600mm)	A	0.2/0.25/ 0.3/0.35/ 0.4/0.45/	6"FLG
HD5652-1		615	1290	515	72"-80"(1800-2000mm)	B	0.5/ Any slots available.	



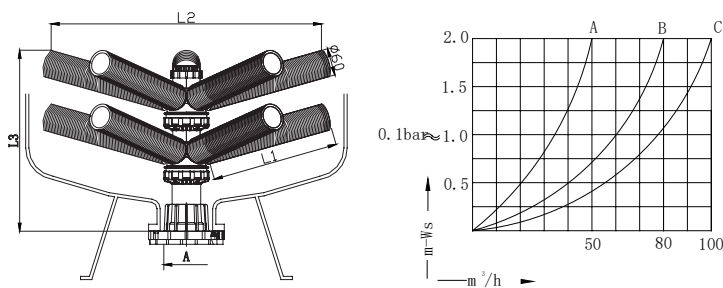


型号 Type	尺寸 Dimension (mm)				罐体尺寸 Tank Size Inches (mm)	流量 Flow	绕丝管缝隙 Slot (mm)	罐体下开口 Bottom Opening
	A	L1	L2	L3				
HD5651-2	110/114 4" NPT/4" BSPT 4" UN	552	1170	650	60"-63"(1500-1600mm)	A	0.2/0.25/ 0.3/0.35/ 0.4/0.45/	6"FLG
HD5652-2		615	1290	665	72"-80"(1800-2000mm)	B	0.5/ Any slots available.	




备注： 流量加大, 法兰开口尺寸请选择4"
If large flow rate, you'd better choose 4" interface.

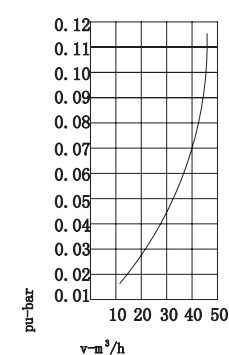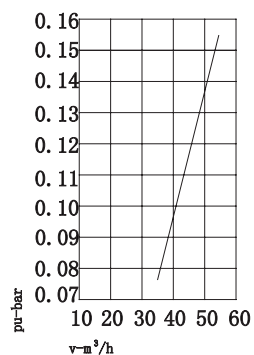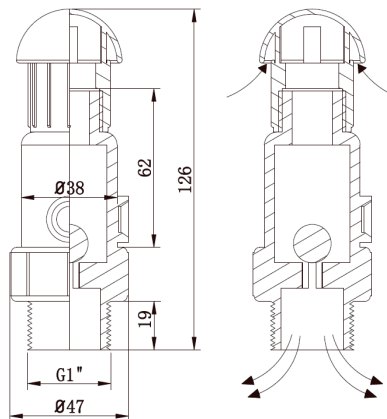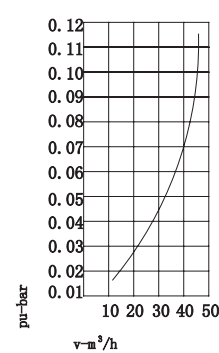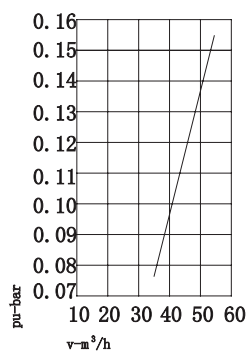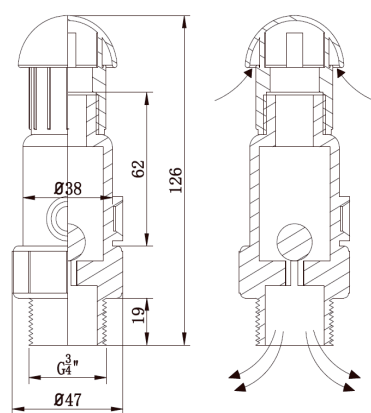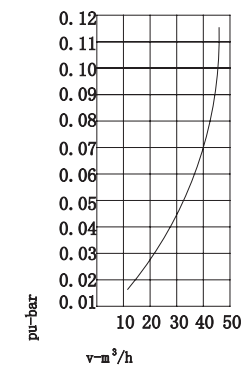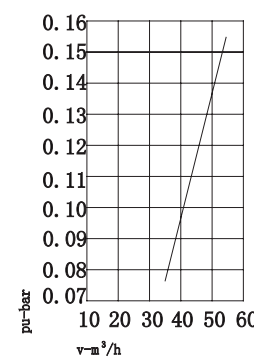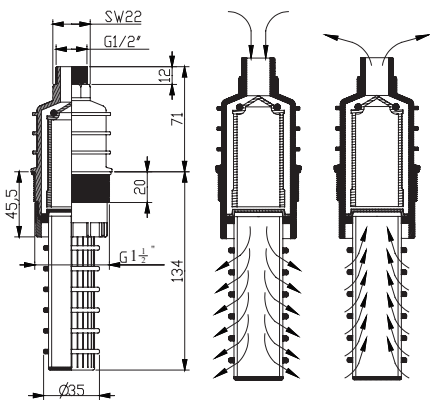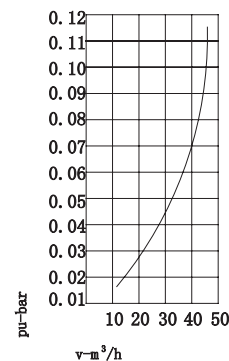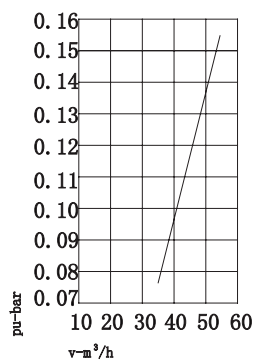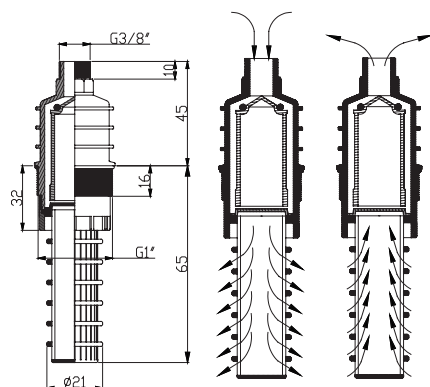

VN-3

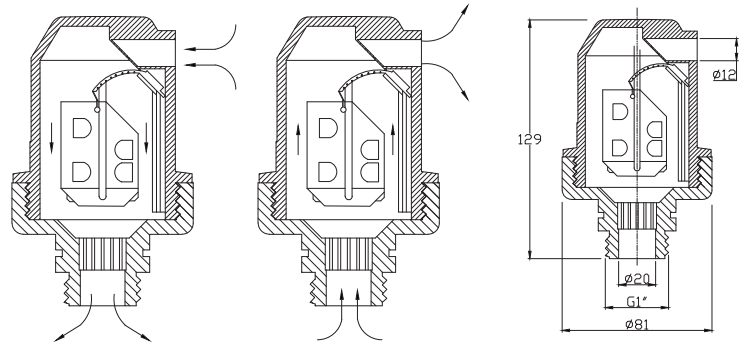

VN-4

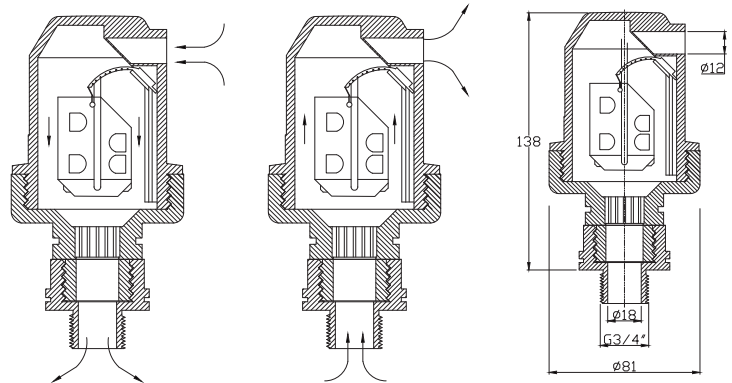

黑二通系列 Tank Head Series




H9901



H9902



H9902-1

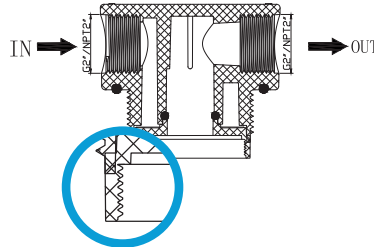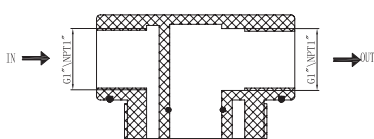

型号 (Type)	名称(Name)	材质 (Material)	罐体开口 (Tank)	接口尺寸 (In/Out)	中心管径 (Center Riser)
H9901	2.5"黑二通 (2.5"tank head)	ABS/PPO	2.5"-8NPSM	G1"/NPT1"/G3/4"/NPT3/4"	3/4"(27mm)/1"(33.4mm)
H9902	4"黑二通 (4"tank head)	ABS/PPO	4"-8UN	G2"/NPT2"/G1.5"/NPT1.5"	1.5"(48.3/50mm)
H9902-1	4.5"黑二通及上下布水器 (4.5"tank head & distributor)	ABS	4.5"Buttress	NPT1	1"(33.4mm)

变径系列 Adaptor Series

Type:H9903-A



Type:H9903-B



Type:H9904



Type:H9905



型号 (Type)	名称 (Name)	材质 (Material)	外螺纹 (Outer Thread)	内螺纹 (Inner Thread)
H9903-A	4"-2.5" 变径 (4-2.5"Adaptor)	ABS	4"-8UN	2.5"-8NPSM
H9903-B	4"-2.5"变径 (4-2.5"Adaptor)	ABS/PPO	4"-8UN	2.5"-8NPSM
H9904	6"-4" 变径 (6-4"Adaptor)	ABS/PPO	6"-8UN	4"-8UN
H9905	6"-4" 法兰变径 (6-4" FLG Adaptor)	PVC/PPO		4"-8UN 4"-8NPT


闷盖、法兰系列 Closure & Flange Series

H9914-A

H9914-B

H9913

H9910-H9912



型号 (Type)	名称 (Name)	材质 (Material)	外螺纹 (Outer Thread)
H9914 -A	4" 闷盖 (4"Closure)	ABS/PPO	4"-8UN
H9914 -B	4" 闷盖 (4"Closure)	ABS/PPO	4"-8UN
H9913	6" 法兰闷盖 (6" FLG Closure)	PVC/PPO	

型号(Type)	名称 (Name)	螺纹 A (Thread A)	螺纹 B (Thread B)	材质 (Material)
H9910	6" flange adapter	3"BSPT/3"NPT	89/90/110/114(mm)	PVC /PPO
H9911	6" flange adapter	3"BSPT/3"NPT	4" UN /4"NPT	PVC /PPO
H9912	6" flange adapter	3"BSPT/3"NPT	3"BSPT/3"NPT	PVC /PPO

树脂捕捉器 Resin Trap



Type (型号)	Connection (接口形式)
RT-1	2"or3 "glue(粘结)
RT-2	2" or 3" union (活结)
RT-3	2" or 3" flange (法兰)

Snowate



Ms Snow

snow@snowate.com

Mobile: +86-15030811699

(WhatsApp, WeChat)